



# UPPERCROSS ENTERPRISES LTD

proud supplier of **MYSON**  
HEATING SOLUTIONS

Europe's leader  
in sustainable  
indoor climate  
comfort solutions



MYSON offers a comprehensive range of heating & cooling solutions for renovation and new construction. UEL are proud distributors of MYSON Heating Solutions in the Republic of Ireland. For Further product information or to find your local stockist contact [sales@uel.ie](mailto:sales@uel.ie) or visit [www.uel.ie](http://www.uel.ie)





# Panel radiators

MYSON has been manufacturing traditional steel panel radiators for over 60 years. Their experience and expertise in this area makes them one of the most trusted, reliable and innovative heating solutions providers in Europe. The range includes classics from the respected SELECT and PREMIER ranges, space saving solutions with the VERTICAL and safety products, such as the LST - available in horizontal and vertical models.

The Panel Radiators includes single, double, and compact models.



# COMPACT

The Purmo Compact radiator is a stylish, elegant and practical radiator, perfect for domestic or commercial applications. With a 33mm profile and convector fins, it ensures a leading performance, even when installed on low temperature systems.

The product range includes type 11 and type 22. With a wide range of heights and lengths available from stock, it truly is a perfect fit for any room size.

- Available in five heights **300mm, 400mm, 500mm, 600mm and 750mm**
- Available in lengths from **400mm to 2300mm**
- Available as single panel, single convector (T11), double panel, double panel, double convector (T22).

## Features

- Durable powder coated in white RAL 9016 paint for a brighter, whiter finish
- Full 10-year warranty
- Manufactured and tested to BS EN 442



## Accessories



**1. Universal floor fixing bracket** for all types - refer to the technicals page.



**2. Compact towel bar**


Length (mm)	Product Code
450	589450
500	589500
600	589600
750	589750
900	589900
1050	5891050



**3. Radiator pack** TRV and Lockshield.



Compact in white

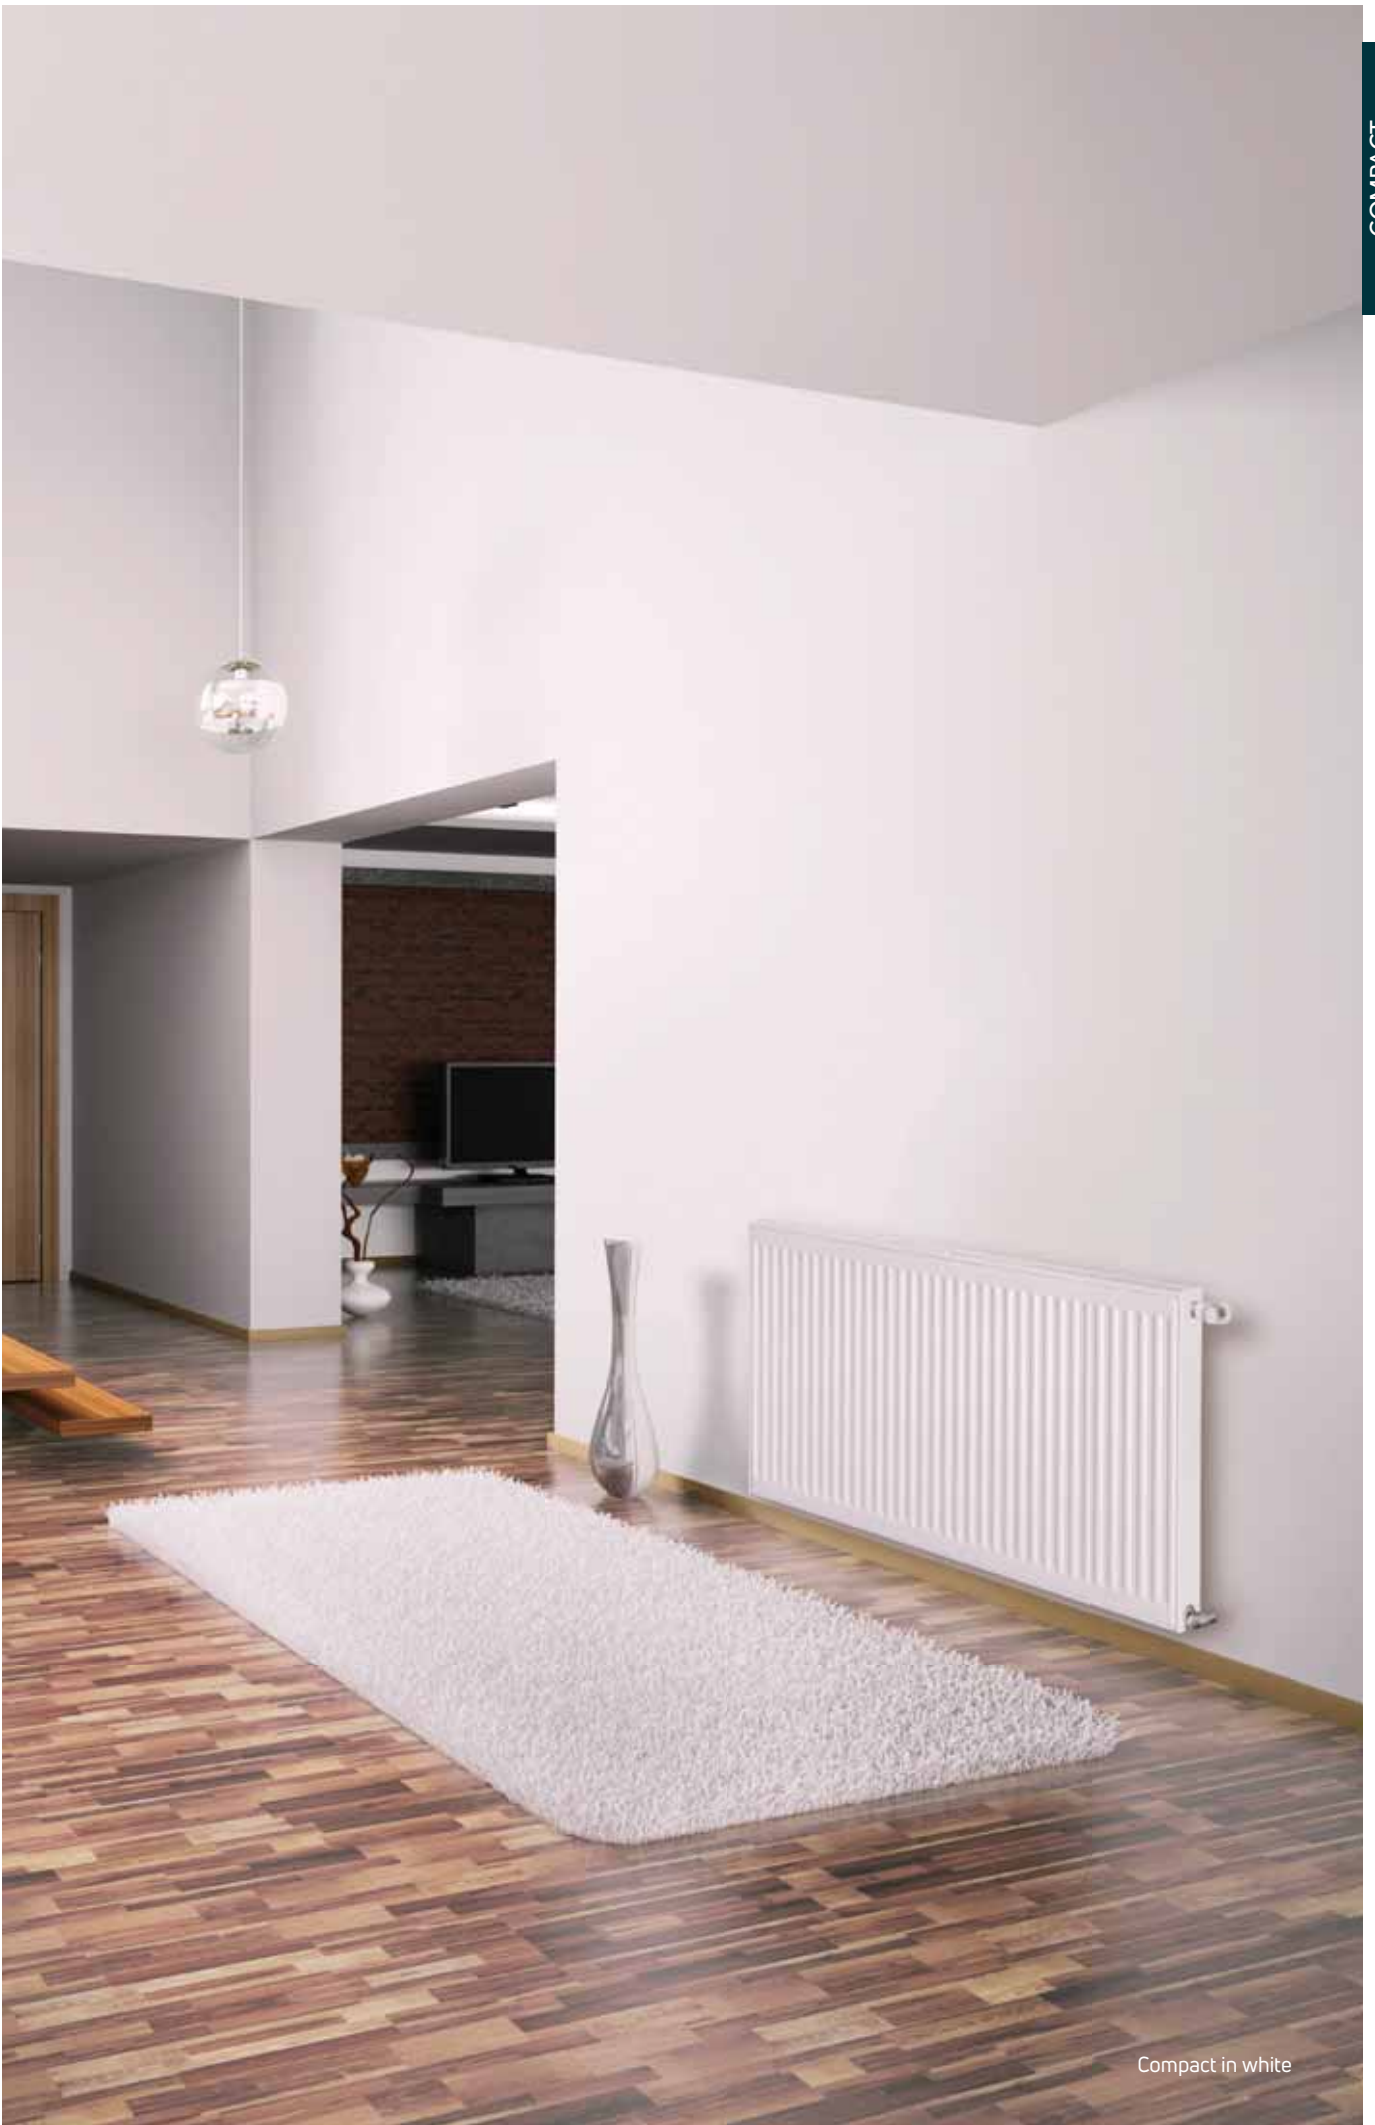

Compact in white

Compact (T11) - Single Panel Single Convector

Product Code	Height (mm)	Width (mm)	Outputs @ dt50		Outputs @ dt30		Weight (kgs)	White RRP	
			Watts	BTU/Hr	Watts	BTU/Hr			
C11 300 0600	300	600	328	1119	169	577	5.40	€55	
C11 300 1000		1000	546	1863	281	959	9.00	€75	
C11 300 1400		1400	764	2604	393	1342	16.81	€95	
C11 300 2000		2000	1092	3726	563	1921	18.00	€130	
C11 400 0500	400	500	356	1250	183	625	7.00	€55	
C11 400 0600		600	427	1457	220	749	8.11	€60	
C11 400 0700		700	498	1699	256	874	9.31	€70	
C11 400 0800		800	569	1941	292	998	10.33	€75	
C11 400 0900		900	2184	640	1123	329	11.59	€80	
C11 400 1000		1000	711	2426	365	1247	12.51	€85	
C11 400 1100		1100	782	2668	402	1372	13.99	€95	
C11 400 1200		1200	853	2910	438	1496	14.75	€100	
C11 400 1300		1300	924	3153	475	1621	16.09	€105	
C11 400 1400		1400	995	3395	512	1746	16.91	€110	
C11 400 1600		1600	1138	3883	585	1996	19.60	€125	
C11 400 1800		1800	1280	4367	658	2246	21.91	€140	
C11 500 0400	500	400	347	1184	178	608	7.40	€55	
C11 500 0500		500	434	1481	223	761	8.82	€65	
C11 500 0600		600	521	1778	268	914	10.22	€65	
C11 500 0700		700	608	2074	312	1066	11.64	€75	
C11 500 0800		800	694	2368	357	1217	12.95	€80	
C11 500 0900		900	781	2665	401	1369	14.42	€85	
C11 500 1000		1000	868	2962	446	1522	15.66	€95	
C11 500 1100		1100	955	3258	491	1674	16.86	€100	
C11 500 1200		1200	1042	3555	535	1827	18.80	€110	
C11 500 1300		1300	1128	3849	580	1979	20.22	€115	
C11 500 1400		1400	1215	4146	624	2130	21.66	€125	
C11 500 1500		1500	1302	4442	669	2283	29.07	€130	
C11 500 1600		1600	1389	4739	714	2435	24.90	€140	
C11 500 1800		1800	1562	5330	803	2739	27.60	€155	
C11 500 2000		2000	1736	5923	892	3044	28.71	€170	
C11 600 0400		600	400	407	1389	208	710	8.41	€65
C11 600 0500	500		509	1737	260	887	10.14	€75	
C11 600 0600	600		611	2085	313	1068	11.87	€85	
C11 600 0700	700		713	2433	365	1245	13.60	€95	
C11 600 0800	800		814	2777	417	1423	15.33	€105	
C11 600 0900	900		916	3125	469	1600	17.06	€115	
C11 600 1000	1000		1018	3473	521	1778	18.79	€125	
C11 600 1100	1100		1120	3821	573	1955	20.52	€135	
C11 600 1200	1200		1222	4169	625	2133	22.25	€140	
C11 600 1300	1300		1323	4514	677	2310	23.98	€155	
C11 600 1400	1400		1425	4862	729	2487	25.71	€165	
C11 600 1600	1600		1629	5558	834	2846	29.16	€185	
C11 600 1800	1800		1832	6251	938	3200	32.62	€205	
C11 600 2000	2000		2036	6947	1042	3555	36.08	€225	
C11 750 0400	750		400	492	1679	251	857	9.85	€65
C11 750 0500			500	615	2098	314	1071	12.31	€75
C11 750 0600		600	738	2518	377	1286	14.78	€105	
C11 750 0700		700	861	2938	440	1500	17.24	€105	
C11 750 0800		800	984	3357	502	1714	19.70	€120	
C11 750 0900		900	1107	3777	565	1928	22.17	€135	
C11 750 1000		1000	1230	4197	628	2143	24.63	€150	
C11 750 1200		1200	1476	5036	754	2571	29.55	€175	
C11 750 1400		1400	1722	5875	879	3000	34.48	€205	
C11 750 1600	1600	1968	6715	1005	3428	39.40	€235		

Heat output shown at ΔT 50°C and ΔT 30°C. All Heat outputs tested according to EN442.  
\*All Prices include VAT

Compact Horizontal (T22) - Double Panel Double Convector									
Product Code	Height (mm)	Width (mm)	Outputs @ dt50		Outputs @ dt30		Weight (kgs)	White RRP	
			Watts	BTU/Hr	Watts	BTU/Hr			
C22 300 0600	300	600	577	1969	295	1007	10.32	€75	
C22 300 0800		800	769	2624	394	1344	13.76	€90	
C22 300 1000		1000	961	3279	492	1679	17.20	€110	
C22 300 2000		2000	1922	6558	985	3361	34.40	€195	
C22 400 0500	400	500	611	2083	312	1063	11.55	€80	
C22 400 0600		600	733	2500	374	1275	13.86	€85	
C22 400 0700		700	855	2916	436	1488	16.17	€95	
C22 400 0800		800	977	3333	498	1701	18.48	€105	
C22 400 0900		900	1099	3749	561	1913	20.79	€115	
C22 400 1000		1000	1221	4166	623	2126	23.10	€125	
C22 400 1100		1100	1343	4583	685	2338	25.41	€135	
C22 400 1200		1200	1465	4999	748	2551	27.72	€145	
C22 400 1300		1300	1587	5416	810	2763	30.08	€155	
C22 400 1400		1400	1709	5832	872	2976	32.34	€165	
C22 400 1600		1600	1954	6666	997	3401	36.96	€190	
C22 400 1800		1800	2198	7499	1121	3826	41.58	€210	
C22 500 0400		500	400	558	2006	298	1018	11.63	€80
C22 500 0500			500	735	2508	373	1273	14.54	€90
C22 500 0600	600		882	3009	448	1527	17.45	€100	
C22 500 0700	700		1029	3511	522	1782	20.23	€115	
C22 500 0800	800		1176	4013	597	2036	23.27	€125	
C22 500 0900	900		1323	4514	671	2291	26.18	€135	
C22 500 1000	1000		1470	5016	746	2545	29.07	€150	
C22 500 1100	1100		1617	5517	821	2800	31.99	€160	
C22 500 1200	1200		1764	6019	895	3054	34.90	€175	
C22 500 1300	1300		1911	6520	970	3309	37.81	€185	
C22 500 1400	1400		2058	7022	1044	3563	40.72	€200	
C22 500 1500	1500		2205	7523	1119	3818	43.63	€225	
C22 500 1600	1600		2352	8025	1194	4073	46.54	€220	
C22 500 1800	1800		2646	9028	1343	4582	52.35	€255	
C22 500 2000	2000		2940	10031	1492	5091	58.17	€280	
C22 600 0400	600		400	684	2334	346	1181	14.72	€100
C22 600 0500		500	855	2917	432	1474	17.88	€115	
C22 600 0600		600	1025	3497	518	1767	21.04	€130	
C22 600 0700		700	1196	4081	605	2064	24.20	€150	
C22 600 0800		800	1367	4664	691	2358	27.36	€165	
C22 600 0900		900	1538	5248	777	2651	30.52	€185	
C22 600 1000		1000	1709	5831	864	2948	33.68	€200	
C22 600 1100		1100	1880	6415	950	3241	36.84	€220	
C22 600 1200		1200	2051	6998	1037	3538	40.00	€235	
C22 600 1300		1300	2222	7581	1123	3832	43.16	€255	
C22 600 1400		1400	2393	8166	1209	4125	46.32	€270	
C22 600 1600		1600	2734	9328	1382	4715	52.64	€310	
C22 600 1800		1800	3076	10495	1555	5306	58.96	€345	
C22 600 2000		2000	3418	11662	1728	5896	65.28	€380	
C22 750 0400		750	400	882	2805	414	1411	17.71	€130
C22 750 0500			500	1028	3506	517	1764	22.14	€155
C22 750 0600	600		1233	4207	620	2117	26.57	€160	
C22 750 0700	700		1439	4908	724	2470	31.00	€205	
C22 750 0800	800		1644	5609	827	2822	35.42	€225	
C22 750 0900	900		1850	6310	931	3175	39.85	€275	
C22 750 1000	1000		2055	7012	1034	3528	44.28	€275	
C22 750 1200	1200		2466	8414	1241	4234	53.13	€360	
C22 750 1400	1400		2877	9816	1448	4939	61.99	€360	
C22 750 1600	1600		3288	11219	1654	5645	70.85	€440	

Heat output shown at ΔT 50°C and ΔT 30°C. All Heat outputs tested according to EN442.

\*All Prices include VAT



**PREMIER HE  
PREMIER METRIC**



MYSON's PREMIER range sets the benchmark for panel radiators offering imperial fitting dimensions, MYSON's PREMIER HE is the perfect panel radiator for retro fitting projects. The PREMIER METRIC offers the metric equivalent and, through the addition of side and top grilles.

- Stylish and hazard reducing round top design
- Manufactured to the highest production standards
- Impressive heat outputs at low energy consumption
- Extensive range of size options





# PREMIER HE

## General specification & technical information



### CERTIFICATION

Manufactured and tested to BS EN 442 & EN 442. Carries the BS Kitemark, CE & UKCA Mark. Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - ISO 45001:2018.



### GUARANTEE

10 year guarantee from date of purchase against manufacturing defects.



### COLOUR

All radiators are de-greased, phosphated and primer coated. An epoxy polyester finishing coat in white (RAL 9016) is applied to all front and rear surfaces.



### ACCESSORIES

Touch up paint available on request.



### SYSTEM

2 pipe pumped indirect domestic and commercial heating applications.



### CONNECTIONS

2 x 1/2" BSP as standard. Selected sizes available with 4 x 1/2" BSP, please see below.



### AIR VENTS

Unique integral air vent situated top right corner of panel, on the 2 tap models only.



### OPERATING PRESSURES

Tested to a pressure of 7 bar.  
Working pressure of up to 5.4 bar.



### OPERATING TEMPERATURE

Maximum 100°C.



### VALVES


Please see page 32 - 35.



### BIM

Visit our website to download the BIM components

### Single Convector Type 11




Nominal Height	Nominal Length (inches - mm)	No. of sections	Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Order Code	RRP
			Watts	Btu/h	Watts	Btu/h		
12 inch (300mm)	15 - 400	8	199	680	104	356	12 SC 15	€110
	31 - 800	16	409	1395	214	730	12 SC 31	€165
	47 - 1200	24	618	2109	323	1103	12 SC 47	€170
	63 - 1600	32	828	2824	433	1477	12 SC 63	€235
15 inch (390mm)	21 - 540	11	354	1207	185	630	15 SC 21	€90
	25 - 641	13	420	1433	219	748	15 SC 25	€105
	29 - 743	15	487	1661	254	867	15 SC 29	€115
	37 - 946	19	620	2114	323	1104	15 SC 37	€120
	41 - 1047	21	686	2342	358	1222	15 SC 41	€130
	45 - 1149	23	753	2568	393	1340	15 SC 45	€135
	49 - 1251	25	819	2796	428	1459	15 SC 49	€145
	53 - 1352	27	886	3024	463	1578	15 SC 53	€155
	57 - 1454	29	952	3249	497	1696	15 SC 57	€165
	61 - 1556	31	1019	3477	532	1815	15 SC 61	€170
	69 - 1759	35	1152	3931	601	2052	15 SC 69	€195
	77 - 1962	39	1285	4385	671	2289	15 SC 77	€220
85 - 2165	43							
21 inch (530mm)	17 - 438	9	375	1281	195	667	21 SC 17	€85
	21 - 540	11	463	1579	241	822	21 SC 21	€95
	25 - 641	13	549	1874	286	976	21 SC 25	€105
	29 - 743	15	637	2173	331	1131	21 SC 29	€105
	33 - 844	17	724	2471	377	1286	21 SC 33	€115
	37 - 946	19	811	2766	422	1440	21 SC 37	€130
	41 - 1047	21	898	3064	467	1595	21 SC 41	€145
	45 - 1149	23	985	3360	513	1749	21 SC 45	€145
	49 - 1251	25	1072	3658	558	1904	21 SC 49	€160
	53 - 1352	27	1160	3956	604	2059	21 SC 53	€175
	57 - 1454	29	1246	4252	649	2213	21 SC 57	€180
	61 - 1556	31	1333	4550	694	2368	21 SC 61	€190
	69 - 1759	35	1507	5143	785	2677	21 SC 69	€220
	77 - 1962	39	1681	5737	875	2986	21 SC 77	€240
85 - 2165	43	1855	6331	966	3295	21 SC 85	€285	
27 inch (690mm)	11 - 286	6	305	1042	157	534	27 SC 11	€95
	17 - 438	9	468	1596	240	818	27 SC 17	€120
	21 - 540	11	577	1968	296	1009	27 SC 21	€115
	25 - 641	13	685	2336	351	1198	27 SC 25	€130
	29 - 743	15	794	2708	407	1388	27 SC 29	€140
	33 - 844	17	902	3079	463	1579	27 SC 33	€145
	37 - 946	19	1010	3447	518	1767	27 SC 37	€165
	41 - 1047	21	1119	3819	574	1958	27 SC 41	€165
	45 - 1149	23	1227	4187	629	2147	27 SC 45	€170
	53 - 1352	27	1445	4930	741	2528	27 SC 53	€210
	61 - 1556	31	1662	5670	852	2907	27 SC 61	€260
	69 - 1759	35	1879	6410	963	3286	27 SC 69	€295

\*All Prices include VAT



**Double Convector  
Type 22**



Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Order Code	RRP
Watts	Btu/h	Watts	Btu/h		
795	2712	413	1408	12 DC 31	€260
1201	4098	624	2129	12 DC 47	€310
1609	5489	835	2851	12 DC 63	€470
2015	6875	1047	3571	12 DC 79	€585
675	2303	348	1186	15 DC 21	€170
801	2734	413	1408	15 DC 25	€200
929	3169	478	1632	15 DC 29	€235
1183	4035	609	2078	15 DC 37	€245
1310	4470	675	2302	15 DC 41	€260
1436	4900	740	2524	15 DC 45	€265
1564	5336	805	2748	15 DC 49	€290
1691	5771	871	2972	15 DC 53	€315
1818	6201	936	3194	15 DC 57	€360
1945	6636	1002	3418	15 DC 61	€380
2199	7502	1133	3864	15 DC 69	€395
2453	8368	1263	4310	15 DC 77	€485
2706	9234	1394	4756	15 DC 85	€490
706	2411	359	1226	21 DC 17	€145
871	2972	443	1511	21 DC 21	€200
1034	3528	526	1794	21 DC 25	€200
1198	4089	609	2079	21 DC 29	€240
1363	4651	693	2365	21 DC 33	€245
1526	5206	776	2647	21 DC 37	€270
1690	5768	859	2933	21 DC 41	€320
1853	6324	942	3215	21 DC 45	€315
2018	6885	1026	3501	21 DC 49	€345
2182	7446	1110	3786	21 DC 53	€375
2345	8002	1192	4069	21 DC 57	€425
2510	8564	1276	4354	21 DC 61	€475
2837	9681	1443	4922	21 DC 69	€505
3165	10798	1609	5490	21 DC 77	€575
3492	11915	1776	6058	21 DC 85	€565
572	1951	291	992	27 DC 11	€175
876	2987	445	1519	27 DC 17	€215
1079	3683	549	1872	27 DC 21	€225
1281	4372	651	2222	27 DC 25	€260
1485	5068	755	2576	27 DC 29	€285
1689	5763	859	2930	27 DC 33	€375
1891	6452	961	3280	27 DC 37	€360
2095	7148	1065	3633	27 DC 41	€410
2297	7837	1168	3984	27 DC 45	€515
2705	9228	1375	4691	27 DC 53	€520
3110	10613	1581	5395	27 DC 61	€595
3516	11997	1787	6099	27 DC 69	€680

\*All Prices include VAT

# PREMIER METRIC

## General specification & technical information

### Single Convector Type 11




Nominal Height	Nominal Length (mm)	Heat Outputs @ $\Delta T$ 50°C		Heat Outputs @ $\Delta T$ 30°C		Order Code	RRP
		Watts	Btu/h	Watts	Btu/h		
300mm	400	199	680	104	356	4PM 30 SC 40	€660
	800	409	1395	214	730	4PM 30 SC 80	€895
	1200	618	2109	323	1103	4PM 30 SC 120	€990
	1600	828	2824	433	1477	4PM 30 SC 160	€1390
	2000	1037	3537	542	1850	4PM 30 SC 200	€1740
	2400	1246	4251	651	2223	4PM 30 SC 240	€2215
	3000	1560	5322	816	2783	4PM 30 SC 300	€2920
450mm	400	288	982	150	512	4PM 45 SC 40	€70
	500	364	1241	190	647	4PM 45 SC 50	€85
	600	440	1500	229	782	4PM 45 SC 60	€95
	700	515	1757	268	916	4PM 45 SC 70	€90
	800	591	2016	308	1051	4PM 45 SC 80	€105
	900	666	2272	347	1184	4PM 45 SC 90	€115
	1000	742	2531	387	1319	4PM 45 SC 100	€125
	1100	818	2790	426	1454	4PM 45 SC 110	€135
	1200	893	3046	465	1588	4PM 45 SC 120	€145
	1400	1044	3562	544	1857	4PM 45 SC 140	€165
	1600	1196	4079	623	2127	4PM 45 SC 160	€190
	1800	1347	4595	702	2395	4PM 45 SC 180	€215
	2000	1498	5110	781	2664	4PM 45 SC 200	€240
	2200	1649	5626	860	2933	4PM 45 SC 220	€275
	2400	1800	6142	938	3202	4PM 45 SC 240	€325
2600	1951	6657	1017	3471	4PM 45 SC 260	€395	
2800	2102	7173	1096	3740	4PM 45 SC 280	€460	
3000	2254	7689	1175	4009	4PM 45 SC 300	€520	
600mm	400	368	1257	190	650	4PM 60 SC 40	€85
	500	466	1588	241	821	4PM 60 SC 50	€95
	600	563	1920	291	993	4PM 60 SC 60	€110
	700	659	2248	341	1162	4PM 60 SC 70	€115
	800	756	2579	391	1334	4PM 60 SC 80	€120
	900	852	2907	441	1503	4PM 60 SC 90	€135
	1000	949	3238	491	1674	4PM 60 SC 100	€155
	1100	1046	3570	541	1846	4PM 60 SC 110	€160
	1200	1142	3898	591	2015	4PM 60 SC 120	€170
	1400	1336	4557	691	2356	4PM 60 SC 140	€200
	1600	1530	5220	791	2699	4PM 60 SC 160	€225
	1800	1723	5879	891	3040	4PM 60 SC 180	€250
	2000	1916	6539	991	3381	4PM 60 SC 200	€280
	2200	2110	7199	1091	3722	4PM 60 SC 220	€335
	2400	2303	7857	1191	4063	4PM 60 SC 240	€405
2600	2497	8520	1291	4405	4PM 60 SC 260	€465	
2800	2690	9179	1391	4746	4PM 60 SC 280	€535	
3000	2884	9839	1491	5087	4PM 60 SC 300	€610	
700mm	300	305	1042	156	534	4PM 70 SC 30	€95
	400	418	1426	214	730	4PM 70 SC 40	€100
	500	528	1802	270	923	4PM 70 SC 50	€110
	600	638	2178	327	1115	4PM 70 SC 60	€120
	700	747	2550	383	1306	4PM 70 SC 70	€130
	800	858	2926	439	1499	4PM 70 SC 80	€140
	900	967	3298	495	1689	4PM 70 SC 90	€160
	1000	1077	3674	551	1882	4PM 70 SC 100	€170
	1100	1187	4050	608	2074	4PM 70 SC 110	€185
	1200	1296	4422	664	2265	4PM 70 SC 120	€200
	1400	1515	5170	776	2648	4PM 70 SC 140	€240
	1600	1736	5922	889	3033	4PM 70 SC 160	€270
	2200	2393	8166	1226	4182	4PM 70 SC 220	€415
	2400	2613	8914	1338	4566	4PM 70 SC 240	€485
	2600	2833	9666	1451	4951	4PM 70 SC 260	€560
2800	3052	10414	1563	5334	4PM 70 SC 280	€650	
3000	3271	11162	1676	5717	4PM 70 SC 300	€730	

# PREMIER METRIC

## Heat outputs












### Double Convector Type 22



Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Order Code	RRP
Watts	Btu/h	Watts	Btu/h		
387	1322	201	686	4PM 30 DC 40	€180
795	2712	413	1408	4PM 30 DC 80	€240
1201	4098	624	2129	4PM 30 DC 120	€310
1609	5489	835	2851	4PM 30 DC 160	€385
2015	6875	1047	3571	4PM 30 DC 200	€480
2421	8262	1258	4291	4PM 30 DC 240	€570
3032	10345	1575	5373	4PM 30 DC 300	€750
545	1861	279	953	4PM 45 DC 40	€120
689	2351	353	1204	4PM 45 DC 50	€150
833	2841	427	1455	4PM 45 DC 60	€180
975	3327	499	1704	4PM 45 DC 70	€190
1119	3817	573	1955	4PM 45 DC 80	€205
1261	4303	646	2204	4PM 45 DC 90	€220
1405	4793	720	2455	4PM 45 DC 100	€240
1548	5283	793	2706	4PM 45 DC 110	€265
1691	5769	866	2955	4PM 45 DC 120	€295
1977	6745	1013	3455	4PM 45 DC 140	€340
2264	7726	1160	3957	4PM 45 DC 160	€385
2550	8702	1306	4457	4PM 45 DC 180	€440
2836	9678	1453	4957	4PM 45 DC 200	€485
3123	10654	1600	5458	4PM 45 DC 220	€550
3409	11631	1746	5958	4PM 45 DC 240	€665
3695	12608	1893	6458	4PM 45 DC 260	€740
3981	13585	2039	6959	4PM 45 DC 280	€845
4268	14562	2186	7459	4PM 45 DC 300	€965
691	2357	351	1198	4PM 60 DC 40	€130
873	2978	444	1514	4PM 60 DC 50	€190
1055	3599	536	1830	4PM 60 DC 60	€200
1235	4215	628	2143	4PM 60 DC 70	€220
1417	4836	721	2459	4PM 60 DC 80	€235
1598	5451	812	2771	4PM 60 DC 90	€265
1780	6072	905	3087	4PM 60 DC 100	€295
1962	6693	997	3403	4PM 60 DC 110	€315
2142	7309	1089	3716	4PM 60 DC 120	€340
2504	8545	1273	4344	4PM 60 DC 140	€400
2868	9787	1458	4976	4PM 60 DC 160	€460
3231	11024	1643	5604	4PM 60 DC 180	€520
3593	12260	1827	6233	4PM 60 DC 200	€570
3956	13496	2011	6862	4PM 60 DC 220	€660
4318	14733	2195	7490	4PM 60 DC 240	€780
4682	15975	2380	8122	4PM 60 DC 260	€895
5044	17212	2565	8750	4PM 60 DC 280	€1020
5407	18448	2749	9379	4PM 60 DC 300	€1150
572	1951	291	992	4PM 70 DC 30	€170
783	2670	398	1357	4PM 70 DC 40	€180
989	3374	503	1715	4PM 70 DC 50	€210
1195	4077	607	2073	4PM 70 DC 60	€230
1399	4774	711	2427	4PM 70 DC 70	€250
1605	5478	816	2785	4PM 70 DC 80	€285
1810	6175	920	3139	4PM 70 DC 90	€325
2016	6878	1025	3496	4PM 70 DC 100	€335
2222	7582	1130	3854	4PM 70 DC 110	€405
2426	8279	1233	4208	4PM 70 DC 120	€440
2837	9679	1442	4920	4PM 70 DC 140	€515
3249	11087	1652	5636	4PM 70 DC 160	€520
4481	15288	2278	7771	4PM 70 DC 220	€810
4891	16689	2486	8483	4PM 70 DC 240	€1035
5304	18096	2696	9199	4PM 70 DC 260	€1180
5714	19497	2905	9911	4PM 70 DC 280	€1340
6125	20897	3113	10623	4PM 70 DC 300	€1520



PREMIER METRIC

- 
**CERTIFICATION**  
 Manufactured and tested to BS EN 442 & EN 442. Carries the BS Kitemark, CE & UKCA Mark. Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - ISO 45001:2018.
- 
**GUARANTEE**  
 10 year guarantee from date of purchase against manufacturing defects.
- 
**COLOUR**  
 All radiators are de-greased, phosphated and primer coated. An epoxy polyester finishing coat in white (RAL 9016) is applied to all front and rear surfaces.
- 
**ACCESSORIES**  
 Touch up paint available on request.
- 
**SYSTEM**  
 2 pipe pumped indirect domestic and commercial heating applications.
- 
**CONNECTIONS**  
 4 x 1/2" BSP. Please see below.
- 
**AIR VENTS**  
 Air vent and plug packs are included in the packaging.
- 
**OPERATING PRESSURES**  
 Tested to a pressure of 7 bar.  
 Working pressure of up to 5.4 bar.
- 
**OPERATING TEMPERATURE**  
 Maximum 100°C.
- 
**VALVES**  
 Please see page 32-35
- 
**BIM**  
 Visit our website to download the BIM components  
[www.myson.co.uk/bim](http://www.myson.co.uk/bim)

\*All Prices include VAT



# PURMO Design Range

## SLIEVE

A popular choice amongst households, the Slieve with its smooth front panel combines designer style with exceptionally high heat outputs. Available in horizontal and vertical models, Slieve complements a range of interiors without compromising on performance.

### Horizontal

- Available in five heights from **288mm to 723mm**
- Available in ten lengths from **500mm to 2000mm**
- Available in 5 types (**H10, H11, H20, H21 and H22**)

### Vertical

- Available in three heights from **1600mm to 2000mm**
- Available in nine lengths from **288mm to 868mm**
- Available in type **V10 and V20**

### Features

- Durable powder coated in white RAL 9016 paint for a brighter, whiter finish
- Available in our 9 colours
- Full 10-year warranty
- Manufactured and tested to BS EN 442



## Add a little colour to your life

A little bit of colour can magically brighten up a room and what better way to complement an interior decor than with a colourful radiator? We offer an extensive range of colours for our Slieve, Adagio, Forza ranges and deliver within 6-8 weeks of ordering.


### Colours for style and choice

Selected to complement the stylish design of our radiators, our colours reflect the beauty of contemporary trends like a breath of warm air.


From our sleek Champagne to our shimmering Matt Charcoal, our colours are extraordinary.




Slieve double vertical in copper




Silver




Bronze



Champagne




Black Quartz




Copper



Anthracite



Matt Charcoal



Matt Iron Oxide



Gun Metal



Slieve single vertical in white

### Slieve Horizontal - Single Panel H10

SLIEVE

Product Code	Height (mm)	Length (mm)	Rows of Tubes	Outputs @ dt50		Outputs @ dt30		Weight (Kg)	White RRP	Colour Code	Colour RRP
				Watts	BTU/Hr	Watts	BTU/Hr				
QHP1026	578	800	8	487	1662	258	880	14.19	€480	QHP1026RAL	POA
QHP1028		1000	8	609	2078	322	1099	17.74	€510	QHP1028RAL	POA
QHP1030		1200	8	731	2494	386	1317	21.29	€540	QHP1030RAL	POA
QHP1031		1400	8	853	2910	451	1539	24.84	€575	QHP1031RAL	POA
QHP1032		1600	8	974	3323	515	1757	28.38	€600	QHP1032RAL	POA

### Slieve Horizontal - Single Panel Single Convactor H11

Product Code	Height (mm)	Length (mm)	Rows of Tubes	Outputs @ dt50		Outputs @ dt30		Weight (Kg)	White RRP	Colour Code	Colour RRP
				Watts	BTU/Hr	Watts	BTU/Hr				
QHP1161	433	600	6	434	1481	228	778	10.63	€440	QHP1161RAL	POA
<b>QHP1162</b>		<b>800</b>	<b>6</b>	<b>578</b>	<b>1972</b>	<b>304</b>	<b>1037</b>	<b>14.18</b>	<b>€490</b>	QHP1162RAL	POA
<b>QHP1102</b>		<b>1000</b>	<b>6</b>	<b>723</b>	<b>2467</b>	<b>380</b>	<b>1297</b>	<b>17.72</b>	<b>€520</b>	QHP1102RAL	POA
<b>QHP1163</b>		<b>1200</b>	<b>6</b>	<b>868</b>	<b>2962</b>	<b>456</b>	<b>1556</b>	<b>21.26</b>	<b>€560</b>	QHP1163RAL	POA
QHP1103		1400	6	1012	3453	532	1815	24.81	€595	QHP1103RAL	POA
QHP114316		1600	6	1157	3948	608	2074	28.35	€610	QHP114316RAL	POA
<b>QHP1104</b>		<b>1800</b>	<b>6</b>	<b>1301</b>	<b>4439</b>	<b>684</b>	<b>2334</b>	<b>31.90</b>	<b>€655</b>	QHP1104RAL	POA
<b>QHP1164</b>		<b>500</b>	<b>7</b>	<b>409</b>	<b>1396</b>	<b>215</b>	<b>734</b>	<b>10.35</b>	<b>€465</b>	QHP1164RAL	POA
<b>QHP1115</b>		<b>600</b>	<b>7</b>	<b>490</b>	<b>1672</b>	<b>258</b>	<b>880</b>	<b>12.42</b>	<b>€495</b>	QHP1115RAL	POA
<b>QHP1165</b>		<b>700</b>	<b>7</b>	<b>572</b>	<b>1952</b>	<b>301</b>	<b>1027</b>	<b>14.49</b>	<b>€525</b>	QHP1165RAL	POA

<b>QHP1116</b>	<b>800</b>	<b>7</b>	<b>654</b>	<b>2231</b>	<b>344</b>	<b>1174</b>	<b>16.56</b>	<b>€555</b>	QHP1116RAL	POA
<b>QHP1112</b>	<b>1000</b>	<b>7</b>	<b>817</b>	<b>2788</b>	<b>430</b>	<b>1467</b>	<b>20.70</b>	<b>€590</b>	QHP1112RAL	POA
<b>QHP1117</b>	<b>1200</b>	<b>7</b>	<b>980</b>	<b>3344</b>	<b>516</b>	<b>1761</b>	<b>24.84</b>	<b>€810</b>	QHP1117RAL	POA
<b>QHP1113</b>	<b>1400</b>	<b>7</b>	<b>1144</b>	<b>3903</b>	<b>602</b>	<b>2054</b>	<b>28.98</b>	<b>€665</b>	QHP1113RAL	POA
<b>QHP1118</b>	<b>1600</b>	<b>7</b>	<b>1307</b>	<b>4459</b>	<b>688</b>	<b>2347</b>	<b>33.12</b>	<b>€695</b>	QHP1118RAL	POA
<b>QHP1114</b>	<b>1800</b>	<b>7</b>	<b>1471</b>	<b>5019</b>	<b>774</b>	<b>2641</b>	<b>37.26</b>	<b>€730</b>	QHP1114RAL	POA
QHP1119	2000	7	1634	5575	860	2934	41.40	€765	QHP1119RAL	POA

<b>QHP1166</b>	<b>500</b>	<b>8</b>	<b>459</b>	<b>1566</b>	<b>242</b>	<b>826</b>	<b>11.86</b>	<b>€495</b>	QHP1166RAL	POA
<b>QHP1105</b>	<b>600</b>	<b>8</b>	<b>551</b>	<b>1880</b>	<b>290</b>	<b>989</b>	<b>14.23</b>	<b>€535</b>	QHP1105RAL	POA
QHP1167	700	8	643	2194	339	1157	16.60	€555	QHP1167RAL	POA
<b>QHP1125</b>	<b>800</b>	<b>8</b>	<b>734</b>	<b>2504</b>	<b>387</b>	<b>1320</b>	<b>18.98</b>	<b>€580</b>	QHP1125RAL	POA
<b>QHP1106</b>	<b>1000</b>	<b>8</b>	<b>918</b>	<b>3132</b>	<b>484</b>	<b>1651</b>	<b>23.72</b>	<b>€630</b>	QHP1106RAL	POA
<b>QHP1126</b>	<b>1200</b>	<b>8</b>	<b>1102</b>	<b>3760</b>	<b>580</b>	<b>1979</b>	<b>28.46</b>	<b>€670</b>	QHP1126RAL	POA
<b>QHP1107</b>	<b>1400</b>	<b>8</b>	<b>1285</b>	<b>4384</b>	<b>677</b>	<b>2310</b>	<b>33.21</b>	<b>€710</b>	QHP1107RAL	POA
<b>QHP1127</b>	<b>1600</b>	<b>8</b>	<b>1469</b>	<b>5012</b>	<b>774</b>	<b>2641</b>	<b>37.95</b>	<b>€755</b>	QHP1127RAL	POA
<b>QHP1108</b>	<b>1800</b>	<b>8</b>	<b>1652</b>	<b>5637</b>	<b>870</b>	<b>2968</b>	<b>42.70</b>	<b>€795</b>	QHP1108RAL	POA
QHP1170	2000	8	1836	6264	967	3299	47.44	€900	QHP1170RAL	POA

<b>QHP1171</b>	<b>500</b>	<b>10</b>	<b>569</b>	<b>1941</b>	<b>299</b>	<b>1020</b>	<b>14.84</b>	<b>€565</b>	QHP1171RAL	POA
QHP1172	600	10	683	2330	359	1225	17.80	€615	QHP1172RAL	POA
<b>QHP1174</b>	<b>800</b>	<b>10</b>	<b>910</b>	<b>3105</b>	<b>478</b>	<b>1631</b>	<b>23.74</b>	<b>€665</b>	QHP1174RAL	POA
<b>QHP1176</b>	<b>1000</b>	<b>10</b>	<b>1138</b>	<b>3883</b>	<b>598</b>	<b>2040</b>	<b>29.67</b>	<b>€710</b>	QHP1176RAL	POA
QHP1178	1200	10	1366	4661	717	2446	35.60	€860	QHP1178RAL	POA
QHP1179	1400	10	1593	5435	837	2856	41.54	€865	QHP1179RAL	POA
QHP1180	1600	10	1821	6213	956	3262	47.47	€890	QHP1180RAL	POA

### Slieve Horizontal - Double Panel H20

Product Code	Height (mm)	Length (mm)	Rows of Tubes	Outputs @ dt50		Outputs @ dt30		Weight (Kg)	White RRP	Colour Code	Colour RRP
				Watts	BTU/Hr	Watts	BTU/Hr				
QHP20580	578	800	8	864	2948	454	1549	25.88	€470	QHP20580RAL	POA
QHP20581		1000	8	1080	3685	568	1938	32.35	€610	QHP20581RAL	POA
QHP20582		1200	8	1296	4422	681	2324	38.82	€650	QHP20582RAL	POA
QHP20583		1400	8	1512	5159	795	2713	45.29	€695	QHP20583RAL	POA
QHP20584		1600	8	1728	5896	908	3098	51.76	€760	QHP20584RAL	POA

### Slieve Horizontal - Double Panel Single Convactor H21

Product Code	Height (mm)	Length (mm)	Rows of Tubes	Outputs @ dt50		Outputs @ dt30		Weight (Kg)	White RRP	Colour Code	Colour RRP
				Watts	BTU/Hr	Watts	BTU/Hr				
QHP2104	578	800	8	1114	3801	579	1976	31.18	€670	QHP2104RAL	POA
QHP2105		1000	8	1392	4750	724	2470	38.98	€760	QHP2105RAL	POA
QHP2106		1200	8	1670	5698	869	2965	46.78	€855	QHP2106RAL	POA
QHP21725	723	800	10	1324	4517	680	2320	39.06	€730	QHP21725RAL	POA
QHP21726		1000	10	1655	5647	851	2904	48.82	€1120	QHP21726RAL	POA

Heat output shown at ΔT 50°C and ΔT 30°C. All Heat outputs tested according to EN442.

\*Orders are subject to Lead time and availability from the manufacturer

\*All prices include VAT

Slieve Horizontal - Double Panel Double Convectur H22

Product Code	Height (mm)	Length (mm)	Rows of Tubes	Outputs @ dt50		Outputs @ dt30		Weight (Kg)	White RRP	Colour Code	Colour RRP
				Watts	BTU/Hr	Watts	BTU/Hr				
QHP22S04	288	1000	4	1063	3627	566	1931	22.84	€710	QHP22S04RAL	POA
QHP22S15		1200	4	1276	4354	679	2317	27.41	€745	QHP22S15RAL	POA
QHP22S4310	433	1000	6	1455	4964	763	2603	33.79	€750	QHP22S4310RAL	POA
QHP22S4312		1200	6	1746	5957	915	3122	40.55	€785	QHP22S4312RAL	POA
QHP22S4314		1400	6	2037	6950	1068	3644	47.31	€920	QHP22S4314RAL	POA
QHP22S4318		1800	6	2619	8936	1373	4685	60.82	€1100	QHP22S4318RAL	POA
QHP22S5006	505	600	7	980	3344	510	1740	23.76	€730	QHP22S5006RAL	POA
QHP22S5008		800	7	1307	4459	681	2324	31.68	€805	QHP22S5008RAL	POA
QHP22S5010		1000	7	1634	5575	851	2904	39.60	€870	QHP22S5010RAL	POA
QHP22S5012		1200	7	1961	6691	1021	3484	47.52	€895	QHP22S5012RAL	POA
QHP22S5014		1400	7	2288	7807	1191	4064	55.44	€1255	QHP22S5014RAL	POA
QHP22S5016		1600	7	2614	8919	1361	4644	63.36	€1355	QHP22S5016RAL	POA
QHP22S5018		1800	7	2941	10035	1531	5224	71.28	€1450	QHP22S5018RAL	POA
QHP22S5020		2000	7	3268	11150	1702	5807	79.20	€1500	QHP22S5020RAL	POA
QHP22S21	578	600	8	1084	3699	561	1914	27.29	€750	QHP22S21RAL	POA
QHP22S22		800	8	1446	4934	748	2552	36.39	€835	QHP22S22RAL	POA
QHP22S23		1000	8	1807	6165	935	3190	45.49	€950	QHP22S23RAL	POA
QHP22S24		1200	8	2168	7397	1121	3825	54.59	€1070	QHP22S24RAL	POA
QHP22S25		1400	8	2530	8632	1308	4463	64.69	€1285	QHP22S25RAL	POA
QHP22S26		1600	8	2891	9864	1495	5101	72.78	€1390	QHP22S26RAL	POA
QHP22S5718		1800	8	3253	11099	1682	5739	81.88	€1485	QHP22S5718RAL	POA
QHP22S27		2000	8	3614	12331	1869	6377	90.98	€1540	QHP22S27RAL	POA
QHP22S7205	723	500	10	1063	3627	545	1860	28.53	€765	QHP22S7205RAL	POA
QHP22S39		600	10	1276	4354	654	2231	34.24	€790	QHP22S39RAL	POA
QHP22S7207		700	10	1488	5077	763	2603	39.94	€830	QHP22S7207RAL	POA
QHP22S40		800	10	1701	5804	872	2975	45.65	€915	QHP22S40RAL	POA
QHP22S41		1000	10	2126	7254	1090	3719	57.06	€1120	QHP22S41RAL	POA
QHP22S42		1200	10	2551	8704	1308	4463	68.47	€1280	QHP22S42RAL	POA

SLIEVE

Slieve Vertical - Single Panel V10

Product Code	Height (mm)	Length (mm)	Rows of Tubes	Outputs @ dt50		Outputs @ dt30		Weight (Kg)	White RRP	Colour Code	Colour RRP
				Watts	BTU/Hr	Watts	BTU/Hr				
QV1043W	1600	288	4	559	1907	285	972	13.29	€500	QV1043RAL	POA
QV1044W		433	6	811	2767	413	1409	19.67	€605	QV1044RAL	POA
QV1016W		505	7	933	3183	475	1621	22.84	€640	QV1016RAL	POA
QV1017W		578	8	1056	3603	538	1836	26.05	€700	QV1017RAL	POA
QV1045W	1800	288	4	625	2133	318	1085	14.80	€520	QV1045RAL	POA
QV1013W		433	6	906	3091	461	1573	21.89	€630	QV1013RAL	POA
QV1022W		505	7	1042	3555	530	1808	25.41	€665	QV1022RAL	POA
QV1014W		578	8	1178	4019	599	2044	28.99	€720	QV1014RAL	POA
QV1023W	2000	650	9	1311	4473	667	2276	32.51	€755	QV1023RAL	POA
QV1024W		795	11	1576	5377	802	2736	39.60	€920	QV1024RAL	POA
QV1001W		288	4	690	2354	350	1194	16.30	€570	QV1001RAL	POA
QV1002W		433	6	1000	3412	508	1733	24.16	€655	QV1002RAL	POA
QV1012W	2000	505	7	1151	3927	585	1996	28.06	€730	QV1012RAL	POA
QV1004W		578	8	1302	4442	662	2259	32.01	€765	QV1004RAL	POA
QV1003W		650	9	1449	4944	737	2515	35.91	€805	QV1003RAL	POA
QV1005W		723	10	1596	5446	812	2771	39.87	€855	QV1005RAL	POA
QV1026W		795	11	1740	5937	886	3023	43.77	€915	QV1026RAL	POA

Slieve Vertical - Double Panel V20

Product Code	Height (mm)	Length (mm)	Rows of Tubes	Outputs @ dt50		Outputs @ dt30		Weight (Kg)	White RRP	Colour Code	Colour RRP
				Watts	BTU/Hr	Watts	BTU/Hr				
QV2006W	1600	505	7	1440	4913	726	2477	43.71	€920	QV2006RAL	POA
QV2007W		578	8	1627	5551	821	2801	49.96	€945	QV2007RAL	POA
QV2008W		650	9	1810	6176	914	3119	56.11	€1025	QV2008RAL	POA
QV201828W		288	4	963	3286	481	1641	28.10	€650	QV201828RAL	POA
QV201836W	1800	360	5	1179	4023	590	2013	34.99	€700	QV201836RAL	POA
QV2036W		433	6	1394	4756	699	2385	41.97	€780	QV2036RAL	POA
QV2012W		505	7	1603	5469	805	2747	48.86	€940	QV2012RAL	POA
QV2013W		578	8	1811	6179	911	3108	55.84	€975	QV2013RAL	POA
QV2014W	2000	650	9	2014	6872	1015	3463	62.73	€1050	QV2014RAL	POA
QV2015W		723	10	2218	7568	1120	3821	69.71	€1115	QV2015RAL	POA
QV2016W		795	11	2418	8250	1223	4173	76.60	€1165	QV2016RAL	POA
QV2017W		868	12	2626	8960	1327	4528	83.56	€1215	QV2017RAL	POA
QV2001W	2000	288	4	1061	3620	525	1791	31.13	€670	QV2001RAL	POA
QV202036W		360	5	1299	4432	645	2201	38.76	€750	QV202036RAL	POA
QV2002W		433	6	1535	5237	765	2610	46.50	€840	QV2002RAL	POA
QV2018W		505	7	1765	6022	882	3009	54.13	€980	QV2018RAL	POA
QV2004W	2000	578	8	1994	6804	1000	3412	61.87	€1030	QV2004RAL	POA
QV2003W		650	9	2218	7568	1116	3808	69.50	€1095	QV2003RAL	POA
QV2005W		723	10	2443	8336	1233	4207	77.24	€1165	QV2005RAL	POA
QV2019W		795	11	2662	9083	1348	4599	84.87	€1240	QV2019RAL	POA
QV2020W		868	12	2891	9864	1464	4995	92.59	€1290	QV2020RAL	POA





## PURMO Design Range

# ADAGIO

Adagio goes beyond a traditional column radiator with its flat panels in 35mm and 70mm widths. Available in horizontal and vertical designs, its clean lines and sleek finish guarantees style in any room. Choose from single or double columns.

### Adagio 35 - Horizontal

- Available in one standard height of **600mm**
- Available in five lengths from **630mm to 1995mm**
- Available in **single and double** flat columns

### Adagio 35 - Vertical

- Available in one standard height of **1800mm**
- Available in four lengths from **420mm to 630mm**
- Available in **single** flat column only

### Adagio 70 - Vertical

- Available in two heights from **1800mm and 2000mm**
- Available in six widths from **320mm to 680mm**
- Available in **single and double** flat columns



### Features

- Durable powder coated in white RAL 9016 paint for a brighter, whiter finish
- Available in our 9 colours. Pricing available on request
- Full 10-year warranty
- Manufactured and tested to BS EN 442



Adagio 35 double horizontal in silver



Adagio 35 single vertical in bronze

## Adagio 35 - Horizontal - Single

Product Code	Height (mm)	Length (mm)	Rows of Tubes	Outputs @ dt50		Outputs @ dt30		Weight (Kg)	White RRP	Colour Code	Colour RRP
				Watts	BTU/Hr	Watts	BTU/Hr				
QS3501W	600	630	18	549	1873	287	979	10.44	€490	QS3501RAL	POA
QS3505W		840	24	732	2498	383	1307	17.52	€550	QS3505RAL	POA
QS3502W		980	28	854	2914	446	1522	20.44	€605	QS3502RAL	POA
QS3503W		1400	40	1220	4163	638	2177	29.20	€925	QS3503RAL	POA
QS3504W		1995	57	1739	5934	908	3098	41.61	€1155	QS3504RAL	POA

## Adagio 35 - Horizontal - Double

Product Code	Height (mm)	Length (mm)	Rows of Tubes	Outputs @ dt50		Outputs @ dt30		Weight (Kg)	White RRP	Colour Code	Colour RRP
				Watts	BTU/Hr	Watts	BTU/Hr				
QD3502W	600	980	28	1389	4739	705	2405	33.60	€1105	QD3502RAL	POA
QD3503W		1400	40	1984	6769	1007	3436	48.00	€1325	QD3503RAL	POA
QD3504W		1995	57	2827	9646	1436	4900	68.40	€1890	QD3504RAL	POA

## Adagio 35 - Vertical - Single

Product Code	Height (mm)	Length (mm)	Rows of Tubes	Outputs @ dt50		Outputs @ dt30		Weight (Kg)	White RRP	Colour Code	Colour RRP
				Watts	BTU/Hr	Watts	BTU/Hr				
QS351842W	1800	420	12	983	3354	508	1733	23.28	€675	QS351842RAL	POA
QS351849W		490	14	1147	3914	592	2020	27.16	€690	QS351849RAL	POA
QS351859W		595	17	1392	4750	719	2453	32.98	€705	QS351859RAL	POA
QS351863W		630	18	1474	5029	761	2597	34.92	€740	QS351863RAL	POA

## Adagio 70 - Vertical - Single

Product Code	Height (mm)	Length (mm)	Rows of Tubes	Outputs @ dt50		Outputs @ dt30		Weight (Kg)	White RRP	Colour Code	Colour RRP
				Watts	BTU/Hr	Watts	BTU/Hr				
QS7020W	1800	320	8	941	3221	485	1655	26.80	€595	QS7020RAL	POA
QS7021W		400	10	1177	4026	607	2071	33.50	€655	QS7021RAL	POA
QS7023W		520	13	1530	5234	789	2692	43.55	€810	QS7023RAL	POA
QS7022W		600	15	1765	6039	910	3105	50.25	€900	QS7022RAL	POA
QS701868W		680	17	2001	6844	1031	3518	56.95	€985	QS701868RAL	POA
QS7001W	2000	320	8	1040	3548	535	1825	30.40	€715	QS7001RAL	POA
QS7002W		400	10	1300	4436	669	2283	38.00	€765	QS7002RAL	POA
QS7004W		480	12	1560	5323	803	2740	45.60	€880	QS7004RAL	POA
QS7008W		520	13	1690	5766	870	2968	49.40	€915	QS7008RAL	POA
QS7003W		600	15	1950	6653	1004	3426	57.00	€940	QS7003RAL	POA
QS7007W	680	17	2210	7541	2210	7541	64.60	€1095	QS7007RAL	POA	

## Adagio 70 - Vertical - Double

Product Code	Height (mm)	Length (mm)	Rows of Tubes	Outputs @ dt50		Outputs @ dt30		Weight (Kg)	White RRP	Colour Code	Colour RRP
				Watts	BTU/Hr	Watts	BTU/Hr				
QD7002W	2000	400	10	2220	7575	1126	3842	73.80	€1245	QD7002RAL	POA
QD7004W		480	12	2664	9090	1351	4610	88.56	€1390	QD7004RAL	POA
QD7003W		600	15	3330	11362	1689	5763	110.70	€1650	QD7003RAL	POA

Heat output shown at  $\Delta T$  50°C and  $\Delta T$  30°C. All Heat outputs tested according to EN442.

**\*Orders are subject to lead times and availability from the manufacturer**

**\*All prices include VAT**



## PURMO Design Range

# FORZA

Forza combines a traditional look with innovative technology. Sleek and classic in its design, this multi-column radiator comes with double, triple or quadruple columns.

### Horizontal

- Available in four heights from **300mm to 750mm**
- Available in seven lengths from **552mm to 1610mm**
- Available in **2, 3 and 4 columns**

### Vertical

- Available in two heights of **1800mm and 2000mm**
- Available in three lengths from **332mm to 598mm**
- Available in **2 and 3 columns**

### Features

- Durable powder coated in white RAL 9016 paint for a brighter, whiter finish
- Available in our 9 colours (6-8 week lead time)
- Supplied with 1/2" BSP flow diverter to reduce "warm up" time when installed Bottom Opposite End (BOE)
- Full 10-year warranty
- Manufactured and tested to BS EN 442



Forza 2 column vertical in anthracite



Forza 2 column vertical in champagne

Forza Horizontal - 2 Column											
Product Code	Height (mm)	Length (mm)	Rows of Sections	Outputs @ dt50		Outputs @ dt30		Weight (Kg)	White RRP	Colour Code	Colour RRP
				Watts	BTU/Hr	Watts	BTU/Hr				
QMC203	500	552	12	456	1556	240	819	9.60	€530	QMC203RAL	POA
QMC205		828	18	684	2334	360	1228	14.40	€740	QMC205RAL	POA
QMC206		1012	22	836	2852	440	1501	17.60	€840	QMC206RAL	POA
QMC21	600	552	12	538	1836	282	962	10.80	€555	QMC21RAL	POA
QMC22		828	18	806	2750	423	1443	16.20	€765	QMC22RAL	POA
QMC23		1012	22	986	3364	518	1767	19.80	€865	QMC23RAL	POA
QMC24		1380	30	1344	4586	706	2409	27.00	€1165	QMC24RAL	POA


Forza Horizontal - 3 Column											
Product Code	Height (mm)	Length (mm)	Rows of Tubes	Outputs @ dt50		Outputs @ dt30		Weight (Kg)	White RRP	Colour Code	Colour RRP
				Watts	BTU/Hr	Watts	BTU/Hr				
QMC301	300	1012	22	728	2484	385	1314	15.40	€865	QMC301RAL	POA
QMC302		1472	32	1059	3613	559	1907	22.40	€1235	QMC302RAL	POA
QMC303	500	552	12	619	2112	326	1112	14.40	€620	QMC303RAL	POA
QMC305		828	18	929	3170	488	1665	21.60	€765	QMC305RAL	POA
QMC306		1012	22	1135	3873	597	2037	26.40	€895	QMC306RAL	POA
QMC307		1380	30	1548	5282	814	2777	36.00	€1200	QMC307RAL	POA
QMC314		1472	32	1651	5633	868	2962	38.40	€1290	QMC314RAL	POA
QMC312		1610	35	1806	6162	950	3241	42.00	€1380	QMC312RAL	POA
QMC308	600	552	12	730	2491	383	1307	16.80	€700	QMC308RAL	POA
QMC309		828	18	1094	3733	574	1958	25.20	€850	QMC309RAL	POA
QMC310		1012	22	1338	4565	702	2395	30.80	€1020	QMC310RAL	POA
QMC317		1196	26	1581	5394	829	2829	36.40	€1240	QMC317RAL	POA
QMC311		1380	30	1824	6223	957	3265	42.00	€1370	QMC311RAL	POA
QMC371	750	552	12	894	3050	467	1593	20.40	€740	QMC371RAL	POA
QMC372		828	18	1341	4575	701	2392	30.60	€885	QMC372RAL	POA
QMC373		1012	22	1639	5592	857	2924	37.40	€1065	QMC373RAL	POA
QMC374		1380	30	2235	7626	1168	3985	51.00	€1430	QMC374RAL	POA

Forza Horizontal - 4 Column											
Product Code	Height (mm)	Length (mm)	Rows of Tubes	Outputs @ dt50		Outputs @ dt30		Weight (Kg)	White RRP	Colour Code	Colour RRP
				Watts	BTU/Hr	Watts	BTU/Hr				
QMC401	300	1012	22	931	3177	491	1675	19.80	€1050	QMC401RAL	POA
QMC402		1472	32	1354	4620	714	2436	28.38	€1545	QMC402RAL	POA
QMC403	600	552	12	973	3320	509	1737	21.60	€790	QMC403RAL	POA
QMC404		828	18	1460	4982	764	2607	32.40	€1045	QMC404RAL	POA
QMC405		1012	22	1784	6087	934	3187	39.60	€1245	QMC405RAL	POA
QMC406		1380	30	2433	8301	1273	4343	54.00	€1470	QMC406RAL	POA
QMC471	750	552	12	1200	4094	625	2133	26.40	€860	QMC471RAL	POA
QMC472		828	18	1800	6142	938	3200	39.60	€1090	QMC472RAL	POA
QMC473		1012	22	2200	7506	1146	3910	48.40	€1285	QMC473RAL	POA
QMC474		1380	30	3000	10236	1563	5333	66.00	€1540	QMC474RAL	POA

Forza Vertical - 2 Column											
Product Code	Height (mm)	Length (mm)	Rows of Tubes	Outputs @ dt50		Outputs @ dt30		Weight (Kg)	White RRP	Colour Code	Colour RRP
				Watts	BTU/Hr	Watts	BTU/Hr				
QMC220	1800	598	13	1664	5664	848	2893	33.80	€1105	QMC220RAL	POA
QMC27	2000	322	7	994	3398	506	1726	20.30	€730	QMC27RAL	POA
QMC28		414	9	1278	4371	651	2221	26.10	€910	QMC28RAL	POA
QMC29		598	13	1846	6312	940	3207	37.70	€1270	QMC29RAL	POA

Forza Vertical - 3 Column											
Product Code	Height (mm)	Length (mm)	Rows of Tubes	Outputs @ dt50		Outputs @ dt30		Weight (Kg)	White RRP	Colour Code	Colour RRP
				Watts	BTU/Hr	Watts	BTU/Hr				
QMC323	2000	414	9	1746	5947	893	3047	39.60	€1000	QMC323RAL	POA
QMC325		598	13	2522	8588	1290	4401	57.20	€1365	QMC325RAL	POA

Optional Forza Foot	
Order code	Description
QMCF1	FORZA Foot 90-120 - white
QMCF1RAL	FORZA Foot 90-120 - coloured
QMCFC1	FORZA Foot cover - white



Feet are sold as single unit. Only available for radiators up to 500mm high. Indicate quantity at time of order. Feet covered by a 2-year warranty.  
 Forza radiators are supplied with 1/2" BSP flow diverter to reduce "warm up" time when installed Bottom Opposite End (BOE).  
 Cannot be installed Top Opposite End (TOE). For full width, add 26mm to the width of the radiator indicated in the pricing tables.

All Forza Radiators: Test Pressure: 13 bar Max Operating Pressure: 10 bar

\*Orders are subject to lead times and availability from the manufacturer \*All prices include VAT



## Heating valves

MYSON has been manufacturing heating valves for over 50 years, producing millions of units on an annual basis. Using environmentally friendly chrome 3 for our manual valves and TRV products, These high quality heating valves are supplied using sustainable and responsible packing.

All MYSON valves are produced under ISO 9001:2008, so whichever products from the range you choose, you are guaranteed they will be the highest quality.

## MATCHMATE

The MATCHMATE range of radiator valves is ideal for use within central heating systems in the domestic housing market. They are available in a number of different models, including compression, pushfit, straight and angled, to suit varying specification requirements. All products are finished in chrome 3 and feature impact resistant valve caps, providing the highest quality at competitive prices. Drain off option also available on most products.



### General Specification



#### CERTIFICATION

Produced under a quality management system - ISO 9001:2008.  
Pressure tested in accordance with BS 2767.



#### GUARANTEE

2 year guarantee from date of purchase against manufacturing defects.



#### COLOUR

Finished in chrome.



#### CONNECTIONS

Compression and pushfit.



#### OPERATING PRESSURES

Operating pressure 10 bar (compression) and 3 bar (pushfit).



#### OPERATING TEMPERATURE

Operating temperature 120°C (compression) and 92°C (pushfit).

### MATCHMATE compression

Description	Colour (Top)	Order Code	RRP
Myson Matchmate 1/2" Olive Lockshield Angle Chrome Drain Off	White	MATE1/2LACD	€15.80
1/2" Myson Matchmate Angled Valve WH.	White	MM1/2WAN	€11.70
1/2" Myson Matchmate Angled Valve LS.	White	MM1/2LAN	€11.70
1/2" Myson Matchmate Straight Valve WH.	White	MM1/2WSN	€5.60
1/2" Myson Matchmate Straight Valve LS.	White	MM1/2LSN	€21.80
MYSON Matchmate Wheelhead Valve Top Only.	White	MMTOPWH	€1.20
MYSON Matchmate Lockshield Valve Top Only.	White	MMTOPLS	€1.20

## MATCHMASTER

MATCHMASTER is a high-quality range of chrome finish heating valves, making them ideal for when a more robust specification is required. The valve uses a graphite gland packing which can be easily compressed by tightening the gland nut to ensure many years of trouble-free operation. There is a wide choice of compression and pushfit connections, as well as drain off options. Straight and angled options are also available upon request.



### General specification



#### CERTIFICATION

Produced under a quality management system - ISO 9001:2008.  
Conforms to BS 2767-10.



#### GUARANTEE

2 year guarantee from date of purchase against manufacturing defects.



#### COLOUR

Finished in chrome.



#### CONNECTIONS

Compression and pushfit.



#### OPERATING PRESSURES

Operating pressure 10 bar (compression) and 3 bar (pushfit).



#### OPERATING TEMPERATURE

Operating temperature 120°C (compression) and 92°C (pushfit).

### MATCHMASTER compression

Description	Colour (Top)	Order Code	RRP
1/2" Myson Matchmaster Angled Valve WH	White	MR1/2WAC	€22.30
1/2" Myson Matchmaster Angled Valve LS	White	MR1/2LAC	€22.30
1/2" Myson Matchmaster Straight Valve WH	White	MR1/2WSC	€30.10
1/2" Myson Matchmaster Straight Valve LS	White	MR1/2LSC	€30.10
15MM Myson Matchmaster Angled Valve WH	White	MR15WAC	€20.20
15MM Myson Matchmaster Angled Valve LS	White	MR15LAC	€20.20

\*Technical information available upon request. Contact sales@uel.ie

\*All prices include VAT

## General Specification

### FULLFLOW

FULLFLOW radiator valves are designed and manufactured to meet the requirements of commercial installations. They feature a non-rising spindle, double EPDM 'O' ring gland seals with an additional 'O' ring back seating arrangement, this enables the FULLFLOW valve to be serviced without the requirement for draining the system, perfect for commercial applications. The range includes compression and screwed iron connections. Straight and angle versions are also available. Product is only available in polished chrome.



#### CERTIFICATION

Produced under a quality management system - ISO 9001:2008. Conforms to BS 2767-10.



#### GUARANTEE

2 year guarantee from date of purchase against manufacturing defects.



#### COLOUR

Finished in polished chrome.



#### CONNECTIONS

Compression and screwed iron.



#### OPERATING PRESSURES

Operating pressure 10 bar.



#### OPERATING TEMPERATURE

Operating temperature 120°C.

### FULLFLOW

Description	Colour (Top)	Order Code	RRP
½" Myson Full Flow Anged Valve WH	White	FF1/2WAC	€39.60
½" Myson Full Flow Angled Valve LS	White	FF1/2LAC	€39.60
½" Myson Full Flow Straight Valve WH	White	FF1/2WSC	€46.10
½" Myson Full Flow Straight Valve LS	White	FF1/2LSC	€46.10
¾" Myson Full Flow Angled Valve WH	White	FF3/4WAC	€53.00
¾" Myson Full Flow Angled Valve LS	White	FF3/4LAC	€53.00
¾" Myson Full Flow Straight Valve WH	White	FF3/4WSC	€46.10
¾" Myson Full Flow Straight Valve LS	White	FF3/4LSC	€46.10
Myson Full Flow WH Cover	White	FFTOWPH	€1.20
Myson Full Flow LS Cover	White	FFTOWPLS	€1.20

## General Specification

### TRV2

The MYSON TRV2 is the most complete thermostatic radiator valve range available for today's central heating systems. The MYSON TRV2 simplifies installation and removes the worry of costly call-backs. It has a liquid sensor fitted at its heart, guaranteeing years of accurate temperature control. It is available with a chrome finish, compression and push fit connections as well as straight and angled variants.



#### CERTIFICATION

Produced under a quality management system - ISO 9001:2008. Conforms to BS 2767-10 and complies to EN 215.



#### GUARANTEE

2 year guarantee from date of purchase against manufacturing defects.



#### COLOUR

Finished in chrome.



#### CONNECTIONS

Compression and pushfit.



#### OPERATING PRESSURES

Operating pressure 10 bar (compression) and 3 bar (pushfit).



#### OPERATING TEMPERATURE

Operating temperature 120°C (compression) and 92°C (pushfit).

### TRV2 compression

Description	Colour (Top)	Order Code	RRP
Myson TRV2 ½" Olive TRV Angle Chrome	White	TRV21/2AC	€34.70
Myson TRV2 ½" Olive TRV Straight Chrome	White	2TRV1/2SN	€45.20
½" Myson Angled GB TRV Valve only	White	2TRV1/2AN	€33.20
¾" Myson Angled GB TRV Valve only	White	2TRV3/4AN	€48.70

### TRV2 pack compression & BSP

Myson Rad-Pack ½" BSP TRV2 & Matchmaker L/S	White	TRV2PAK1/2AC	€50.70
---	-------	--------------	--------

### TRV2 Accessories

½" Myson Angled Olive Body only CP		TRV1/2ACBODY	€33.20
Myson RV 15mm or ½" BSP TRV Straight Chrome Body only		TRV2151/2SCBODY	€79.10
Myson Standard TRV Head only (1-Ctn)		2TRVHEADN	€25.50
Myson Remote Sensor Head 5mtr Capillary		2TRVRSHEAD5	€103.50
Myson Remote Sensor Head 2mtr Capillary		2TRVRSHEAD2	€82.80
Myson Remote Adjuster 2mtr Capillary		2TRVADJHEAD2	€113.30
Myson TRV Adaptor		2TRVADAP	€14.80
Myson TRV2 15mm TRV Angle Chrome Pushfit		TRV2151	€25.50









## PETITE

The MYSON PETITE Thermostatic Radiator Valve is a beautifully designed TRV for today's heating systems. The PETITE combines attractive design with total reliability. It has a liquid sensor fitted at its heart, guaranteeing years of accurate temperature control. The PETITE is available as a single valve or a convenient 'TRV & manual' valve pack, in either 10mm or 15mm sizes with a chrome finish. The range includes compression and pushfit connections, with straight and angle options available.



## General Specification

-  **CERTIFICATION**  
Produced under a quality management system -ISO 9001:2008 and complies to EN 215.
-  **GUARANTEE**  
2 year guarantee from date of purchase against manufacturing defects.
-  **COLOUR**  
Finished in chrome.
-  **CONNECTIONS**  
Compression and pushfit.
-  **OPERATING PRESSURES**  
Operating pressure 10 bar (compression) and 3 bar (pushfit).
-  **OPERATING TEMPERATURE**  
Operating temperature 120°C (compression) and 92°C (pushfit).

### PETITE compression

Description	Colour (Top)	Order Code	RRP
½" Myson Petite TRV Pack (new type)	White	PETPAK1/2AC	€26.30
½" Myson Petite TRV Pack (old type)	White	PETPAK1/2N	€27.60



## MOTORISED VALVES & ACCESSORIES


Motorised valves control the flow of water between heating and hot water zones in domestic fully pumped central heating systems.



The MYSON range of motorised valves has been designed with complete reliability and compatibility in mind. Our motorised valves are compatible as replacements to all leading makes, so you don't need to look anywhere else.

The range has low contact resistance switching for compatibility with the low voltage/low current switching found on many boilers throughout the UK and Europe.

## General specification

-  **GUARANTEE**  
2 year guarantee from date of purchase against manufacturing defects.

### Motorised valves

Description	Order Code	RRP
Two Port Motorised Zone Valve 1" Imperial Olive Compression	MPE2281R	€172.20
Two Port Motorised Zone Valve ¾" Imperial Olive Compression	MPE2221R	€137.10
Three Port Motorised Divertor Valve - 22mm	MPE322DV	€142.70
Three Port Motorised Zone Valve ¾" Imperial Olive Compression	MPE3281R	€194.30
Three Port Motorised Zone Mid Position Valve 1" Imperial Olive Compression	MPE33/4	€216.20
Three Port Motorised Zone Mid Position Valve ¾" Imperial Olive Compression	MPE31	€216.20

\*Technical information available upon request. Contact sales@uel.ie

\*All prices include VAT



# ELECTRIC HEATING

RIO PLUS



## RIO PLUS

The RIO PLUS Range is a modern electric panel radiator with unique and energy saving features built in to the electronics. It is available in three models RIO COMPACT PLUS, RIO PLAN PLUS and RIO LINEA PLUS, all models offer superb temperature controllability via a clear visual digital display discreetly housed on the side panel. All models are fully programmable, with several operating modes including; open window function, frost protection and an adjustable surface temperature which creates a comfortable, radiant warmth. RIO PLUS radiators can now be controlled via an app as well as via voice control linked to any of the well-known home automation systems on the market.



RIO COMPACT PLUS



RIO COMPACT PLUS



RIO PLAN PLUS

RIO LINEA PLUS

**RIO PLAN PLUS**

The sleek flat front panel design of the RIO PLAN PLUS offers a contemporary alternative to the traditional RIO COMPACT PLUS radiator.

**RIO LINEA PLUS**

The RIO LINEA PLUS model takes this modern styling one step further with a decorative, rather than flat, front panel.

# RIO PLUS RANGE

## General specification & technical information

- CERTIFICATION**  
Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - ISO 45001:2018. Carries the CE and UKCA mark and conforms to the Low Voltage Directive 2014/35/EU and the EMC Directive 2014/30/EU.
- GUARANTEE**  
2 year guarantee from date of purchase against manufacturing defects.
- COLOUR**  
Finished in white (RAL 9016).
- MATERIAL**  
Manufactured from steel and filled with environmentally friendly vegetable oil.
- ACCESSORIES**  
TOUCH4 - 4 zone touch screen programmer. Details available upon request

**SEALED ELECTRIC**

**IP RATING**  
IP44.

**WASTE DISPOSAL**  
According to The WEEE Directive (2012/19/EU). Please see page 255.

**ECO DESIGN DIRECTIVE**  
Conforms to the standards (EU) 2015/1188.



RIO PLAN PLUS



RIO LINEA PLUS

### Technical characteristics

Measured temperature precision	0.1°C
Operating temperature	-30°C to +50°C
Setting temperature range	+0.5°C to +30°C
Electrical protection	Class 1 – IP44
Power supply	230 VAC – 50 Hz

For more technical information, please refer to the installation instructions available on our website.

### Accessories

Product	Order Code
<b>TOUCH4*</b> - 4 Zone, Touch Screen Programmer (hard wired)	TOUCH4 - refer to page 248
<b>Zigbee 3.0 High End Gateway</b> - Manage your installation remotely with a mobile application: - Adjust the temperature of each room - Create and manage one or more comfort zones - Digital display of energy consumption	UNIPLGATEWAY
<b>90° Adaptor</b> - For side arrangement of the RIO control, suitable for RIO COMPACT PLUS, RIO PLAN PLUS and RIO LINEA PLUS (also can be used with MYSON FINESSE control).	RIOPLUS90ADAP

\*Please refer to our website for wiring diagram.



TOUCH4\*



UNIPLGATEWAY



RIOPLUS90ADAP

## Technical information & heat outputs

### RIO COMPACT PLUS

Order Code	Nominal Height (mm)	Nominal Length (mm)	Weight (packed - kg)	Rated Watts	RRP
RIOC30DX50	300	500	12.0	500	€980
RIOC30DX80	300	800	16.9	750	€1100
RIOC30DX100	300	1000	20.5	1000	€1170
RIOC30DX130	300	1300	26.5	1250	€1240
RIOC30DX160	300	1600	31.5	1500	€1310
RIOC30DX200	300	2000	38.5	2000	€1380
RIOC50DX40	500	400	14.6	500	€980
RIOC50DX50	500	500	17.0	750	€1075
RIOC50DX65	500	650	21.5	1000	€1155
RIOC50DX80	500	800	24.6	1250	€1275
RIOC50DX95	500	950	31.0	1500	€1420
RIOC50DX125	500	1250	38.6	2000	€1560

### RIO PLAN PLUS

RIOP30DX50	300	500	13.3	500	€1160
RIOP30DX80	300	800	18.9	750	€1350
RIOP30DX100	300	1000	23.0	1000	€1420
RIOP30DX130	300	1300	29.8	1250	€1515
RIOP30DX160	300	1600	35.6	1500	€1610
RIOP30DX200	300	2000	43.6	2000	€1690
RIOP50DX40	500	400	16.3	500	€1170
RIOP50DX50	500	500	19.1	750	€1315
RIOP50DX65	500	650	24.2	1000	€1425
RIOP50DX80	500	800	27.9	1250	€1570
RIOP50DX95	500	950	35.0	1500	€1740
RIOP50DX125	500	1250	43.8	2000	€1915

### RIO LINEA PLUS


RIOL30DX50	300	500	13.3	500	€1160
RIOL30DX80	300	800	18.9	750	€1350
RIOL30DX100	300	1000	23.0	1000	€1420
RIOL30DX130	300	1300	29.8	1250	€1515
RIOL30DX160	300	1600	35.6	1500	€1610
RIOL30DX200	300	2000	43.6	2000	€1690
RIOL50DX40	500	400	16.3	500	€1170
RIOL50DX50	500	500	19.1	750	€1315
RIOL50DX65	500	650	24.2	1000	€1425
RIOL50DX80	500	800	27.9	1250	€1570
RIOL50DX95	500	950	35.0	1500	€1740
RIOL50DX125	500	1250	43.8	2000	€1915

\*Orders are subject to lead times and availability

\*All prices include VAT



  
**KICKSPACE®**

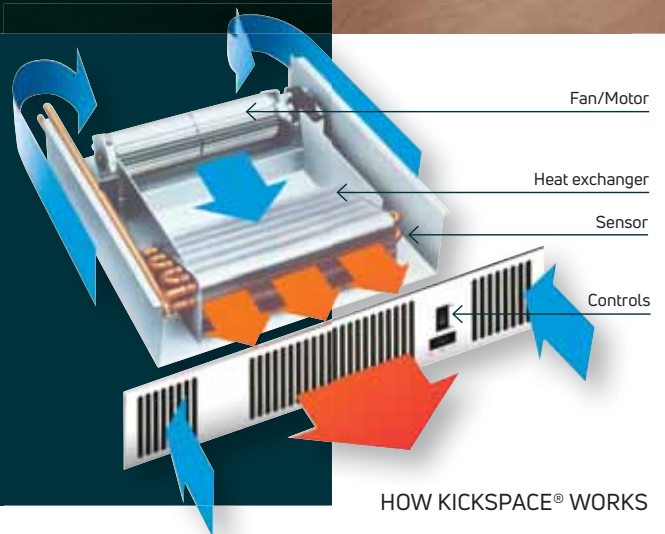

HOW KICKSPACE® WORKS

Clever by design, MYSON's innovative, plinth heaters provide a space saving heating solution for kitchens where vital wall space is often taken up by a traditional radiator. The discrete KICKSPACE® can be fitted easily under units allowing more interior design freedom and rapid space heating using a high surface area heat exchanger.

# NEW & IMPROVED



## Electric - KICKSPACE® 500E & 600E ECO

The electric KICKSPACE® is perfect for properties without a central heating system or in rooms where there is no existing pipework. Quick and easy to fit, the 500E ECO can provide a heat output up to 2kW while the 600E ECO is up to 3kW.



500E & 600E ECO

## Duo - KICKSPACE® 500 DUO ECO

The KICKSPACE® 500 DUO ECO model combines the advantages of the hydronic and electric models, with the flexibility to switch between central heating and electric modes.



500 DUO ECO



**Wireless Thermostat**  
Supplied with KICKSPACE® 500E, 600E & DUO ECO models

## Hydronic - KICKSPACE® 500, 600 & 800

The most popular range of KICKSPACE® are the hydronic models that integrate directly into the existing central heating system. These three models provide heat outputs from 1kW to 2.6kW, providing warmth for any room. The fan on these models will activate with the central heating system.

## Low voltage hydronic - KICKSPACE® 600-12V

This unique model means you get all the advantages of KICKSPACE® but it can be used in areas of high humidity, such as bathrooms and en-suites.



500

## Hydronic - KICKSPACE® 80S & 80D

The KICKSPACE® 80S and 80D are a lower height and suitable for Ikea and European style kitchen units. They have all the features of the KICKSPACE® and come in a single and double width for extra output.



80S



80D

### Hydronic models

Dimensions		Fan Speed	Model				
			500	600	800	80S	80D
Dimensions	Nominal Height (mm)	-	101	101	101	80	80
	Depth (mm)	-	309	309	309	301	301
	Length (mm)	-	496	550	603	560	760

Sound Levels*	Sound Pressure (dBA) (at 2.5m)	Fan Speed					
		Normal	Boost	Normal	Boost	Normal	Boost
Sound Levels*	Sound Pressure (dBA) (at 2.5m)	Normal	25.7	26.4	28.5	24.5	21.8
		Boost	38.1	37.2	49.8	31.4	35.6

Weight, Water Content & Motor Power	Weight, Water Content & Motor Power						
	Unit Weight (kg)	-	4.3	5.0	5.5	3.83	5.13
	Water Content (l)	-	0.26	0.30	0.34	0.17	0.25
Motor Power (W-max.)	-	25	40	40	13	17	

Air Flow Rates	Air Flow (m³/h)	Fan Speed					
		Normal	Boost	Normal	Boost	Normal	Boost
	Air Flow (m³/h)	Normal	70	106	139	68	87
		Boost	90	138	210	71	90
Air Flow (ft³/h)	Normal	2471	3742	4908	2313	3192	
	Boost	3177	4872	7415	2511	3069	

Model	Grill Supplied	Order Code	RRP Rounded
Myson Kick Space 500 with White Grill	White	3KICK500	€560
Myson Kick Space 600 with White Grill	White	3KICK600	€680
Myson Kick Space 800 with White Grill	White	3KICK800	€680


\*Sound levels tested in accordance with EN 23741.

†Includes transformer.

\*\*All prices include VAT

TECHNICAL  
SPECIFICATIONS

REVIVE

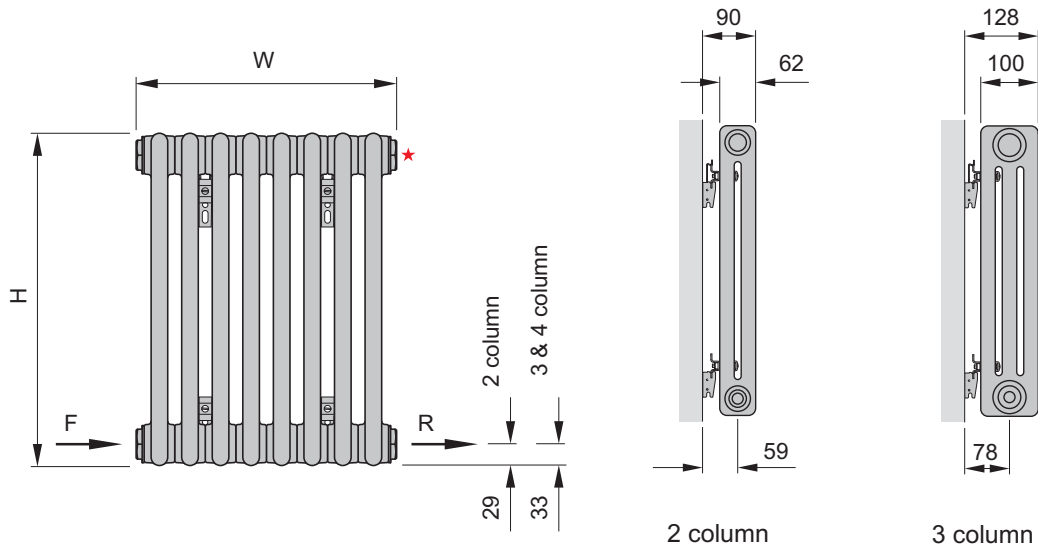


	Height (mm)	Width (mm)	BTU	Watts	Pipe Centres
U2150-8	1500	398	2839	832	488
U2180-8	1800	398	3385	992	488
U2180-10	1800	490	4231	1240	580
U2200-8	2000	398	3767	1104	488
U2200-10	2000	490	4709	1380	580
U2180-10-RM	1800	490	4231	1240	580
U2200-10-RM	2000	490	4709	1380	580
U2180-10-BK	1800	490	4231	1240	580
U2200-10-BK	2000	490	4709	1380	580
U3180-10	1800	490	5664	1660	580
U3180-10-RM	1800	490	5664	1660	580
U3200-10	2000	490	6244	1830	580
U3200-10-RM	2000	490	6244	1830	580
U3030-19	300	904	2074	608	994
U3030-25	300	1180	2730	800	1270
U3030-32	300	1502	3494	1024	1592
U3030-36	300	1686	3931	1152	1776
U3030-19-RM	300	904	2074	608	994
U3030-25-RM	300	1180	2730	800	1270
U3030-32-RM	300	1502	3494	1024	1592
U3030-36-RM	300	1686	3931	1152	1776
U3045-19	450	904	3034	889	994
U3045-25	450	1180	3992	1170	1270

	Height (mm)	Width (mm)	BTU	Watts	Pipe Centres
U3045-32	450	1502	5110	1498	1592
U3045-36	450	1686	5749	1685	1776
U3045-19-RM	450	904	3034	889	994
U3045-25-RM	450	1180	3992	1170	1270
U3045-32-RM	450	1502	5110	1498	1592
U3045-36-RM	450	1686	5749	1685	1776
U3060-9	600	440	1870	548	530
U3060-13	600	628	2701	792	718
U3060-19	600	904	3948	1157	994
U3060-25	600	1180	5195	1523	1270
U3060-32	600	1502	6649	1949	1592
U3060-36	600	1686	7480	2192	1776
U3060-9-RM	600	440	1870	548	530
U3060-13-RM	600	628	2701	792	718
U3060-19-RM	600	904	3948	1157	994
U3060-25-RM	600	1180	5195	1523	1270
U3060-32-RM	600	1502	6649	1949	1592
U3060-36-RM	600	1686	7480	2192	1776
U3060-13-BK	600	628	2701	792	718
U3060-19-BK	600	904	3948	1157	994
U3060-25-BK	600	1180	5195	1523	1270
U3060-32-BK	600	1502	6649	1949	1592
U3060-36-BK	600	1686	7480	2192	1776




# VALERIE - SINGLE


VFP418W

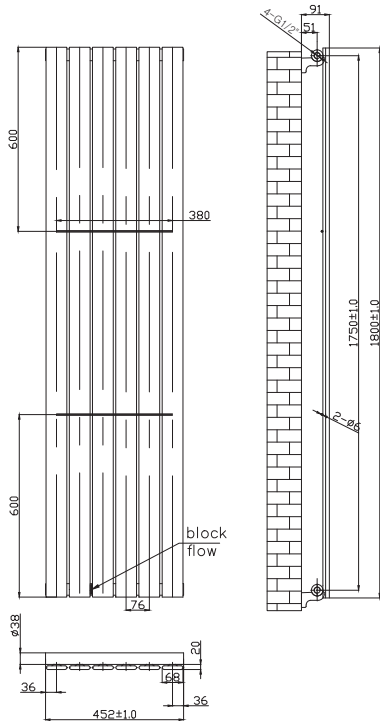

VFP518W

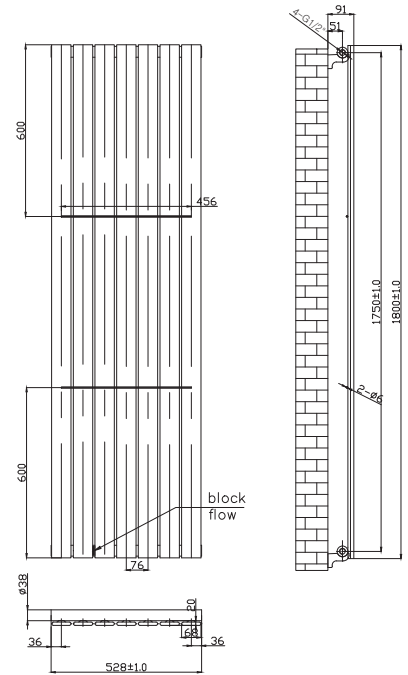


VFP620W

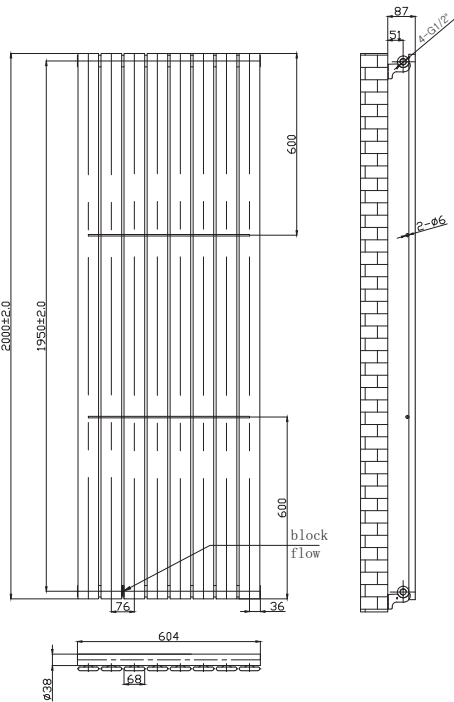


	Height (mm)	Width (mm)	BTU	Watts	Pipe Centres
VFP418W	1800	450	3253	953	540
VFP518W	1800	525	3795	1112	615
VFP620W	2000	600	4786	1403	690
VFP418A	1800	450	3253	953	540
VFP518A	1800	525	3795	1112	615
VFP620A	2000	600	4786	1403	690

# VALERIE - DOUBLE

VFP418WDP

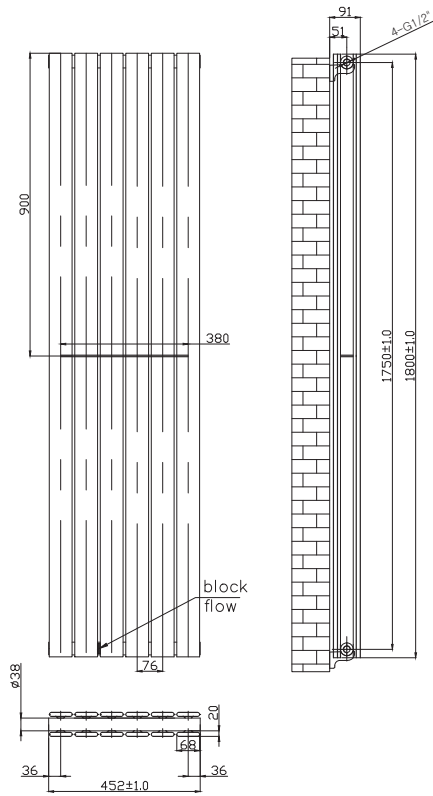


VFP518WDP

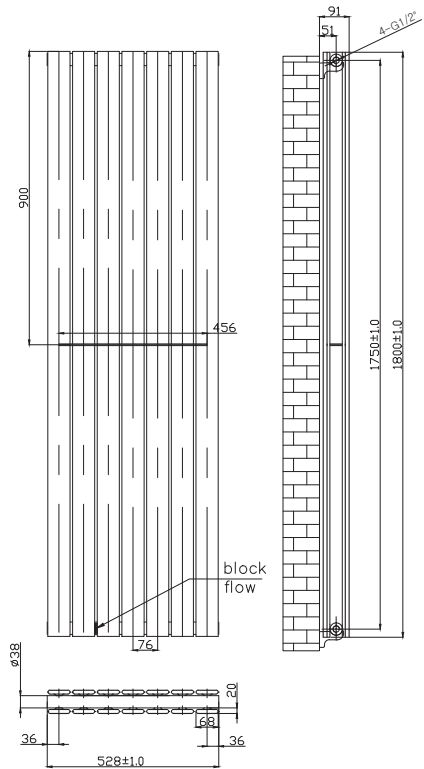

	Height (mm)	Width (mm)	BTU	Watts	Pipe Centres
VFP418WDP	1800	452	6304	1848	542
VFP518WDP	1800	525	7354	2155	615
VFP620WDP	2000	600	8764	2569	690
VFP418ADP	1800	452	6304	1848	542
VFP518ADP	1800	525	7354	2155	615
VFP620ADP	2000	600	8764	2569	690

# SELECT COMPACT

## Mounting positions & dimensions

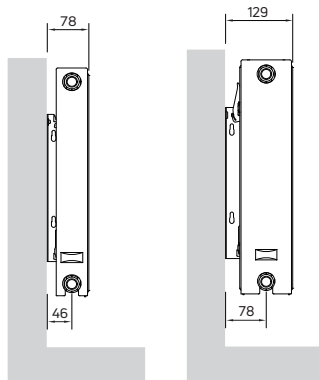

Type 11

Type 22

Nominal Height (mm)	A (mm)
300	250
400	350
500	450
600	550
700	650

## Top View

type 11




type 22



## Installation


types 21S, 22, 33

type 11

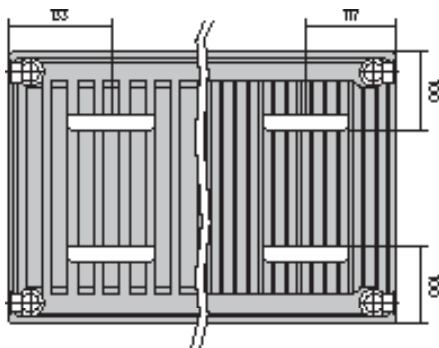

## Brackets

wall bracket types 11

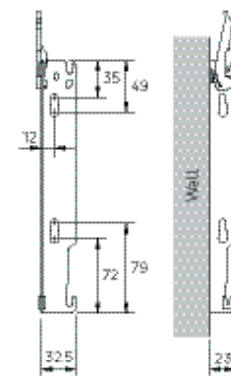

floor bracket all types





### RH033

Radiator to wall distance: Any

Maximum load of a single bracket:  
Vertically - 180kg  
Pulling - 35kg

wall bracket types 22

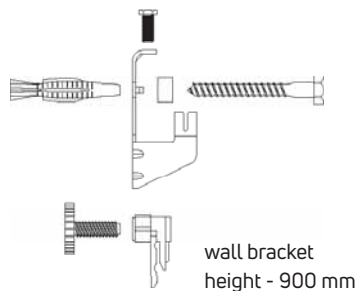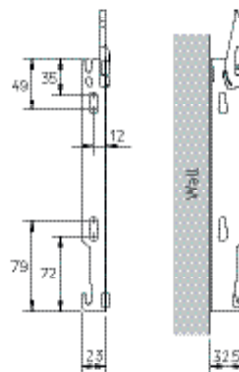



Height 300 - 600mm	
Radiator Length (mm)	Quantity of Floor Brackets
400 - 1800	2
2000 - 2300	3

Height 700 - 900mm	
Radiator Length (mm)	Quantity of Floor Brackets
300 - 1200	2
1400 - 2000	3

## Connection Options

NA = 50mm less than overall height

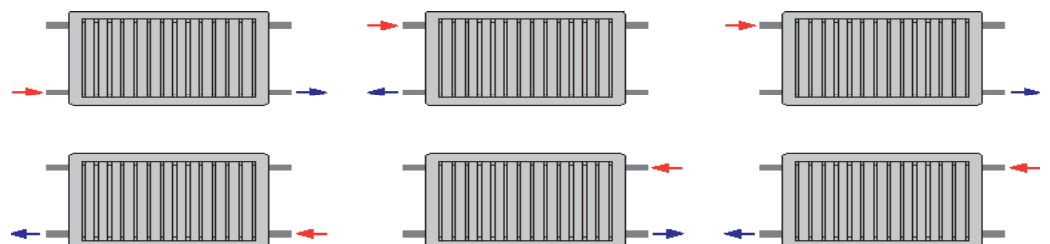

Suitable for Bottom Opposite End (BOE), Top Bottom Same End (TBSE) and Top Bottom Opposite Ends (TBOE), 4 x 1/2" BSP tappings.


All Compact radiators:

Test Pressure 10.5 bar.

Max operating pressure 8 bar.

# PREMIER HE


## Mounting positions & dimensions

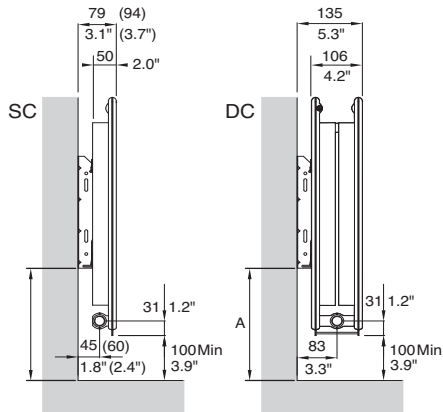


Nominal Height (in)	A		B	
	(in)	(mm)	(in)	(mm)
12	6.65	170	N/A	N/A
15	6.93	177	13.2	335
21	9.81	250	18.7	475
27	16.10	410	25.0	635

## Wall Brackets


12" Wall Bracket\*\*\*

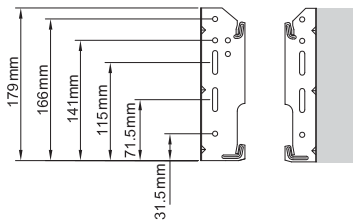

15/21/27" Wall Bracket\*\*\*



Bracket Plan View




N.B. Figures in brackets apply when hanging with long leg.

Long leg suitable for hanging Type 11 (SC) radiators only.

Short leg suitable for radiator Types 11, 21 & 22.

\*\*\*Security clip available on request

## Bracket positions & dimensions

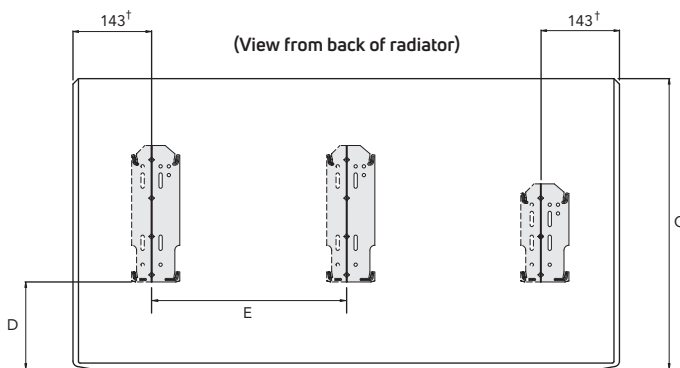


Nominal Height (in)	C		D	
	(in)	(mm)	(in)	(mm)
12	11.8	300	2.75	70
15	15.4	390	3.03	77
21	20.9	530	5.91	150
27	27.2	690	12.20	310

Nominal Length (in)	E	
	(in)	(mm)
77	34	864
79	35	889
85	38	965

N.B. Radiators up to and including 69" long have two brackets. Radiators 77" and longer have three brackets. The position of the centre bracket is given in the table.


† 118mm from each end for 11" (286mm) long radiators only.

## Mounting positions, dimensions & wall brackets

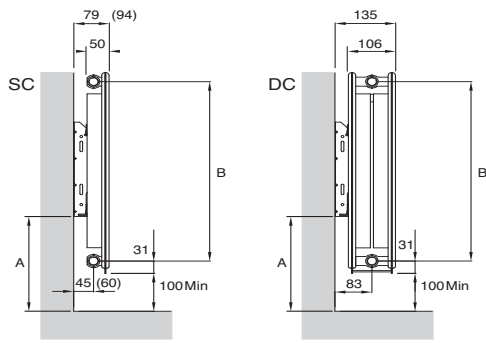


Nominal Height (mm)	A	B
	(mm)	(mm)
300	170	243
450	237	393
600	320	543
700	410	643


300mm Wall Bracket\*

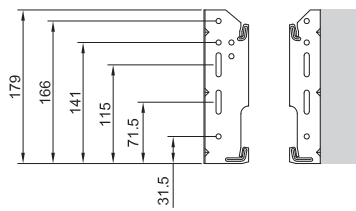

450/600/700mm Wall Bracket\*



Bracket Plan View




N.B. Figures in brackets apply when hanging with long leg.

Long leg suitable for hanging Type 11 (SC) radiators only. Short leg suitable for radiator Types 11, 21 & 22.

\*Security clip available on request

## Bracket positions & dimensions

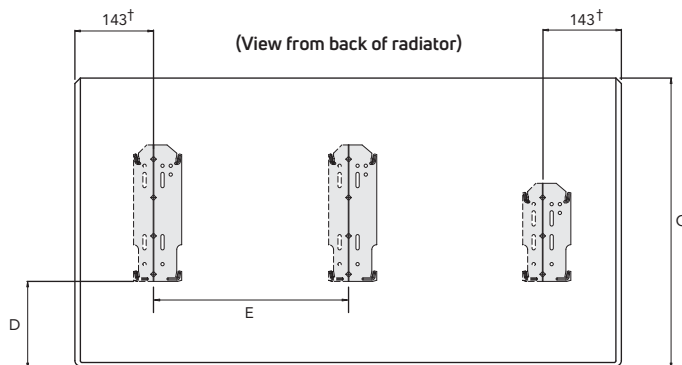

Nominal Height (mm)	C	D
	(mm)	(mm)
300	300	70
450	450	137
600	600	220
700	700	310

Nominal Length (mm)	E
	(mm)
1800	762
2000	864
2200	965
2400	1067
2600	1168
2800	1270
3000	1372


N.B. Radiators up to and including 1600mm long have two brackets. Radiators 1800mm and longer have three brackets. The position of the centre bracket is given in the table.

† 118mm from each end for 300mm long radiators only.

# SLEEVE - DESIGN RANGE

## Slieve Horizontal - Water Content (L/m)

Type	Height (mm) / Fin Height (mm)				
	288 / 288	433 / 360	505 / 433	578 / 505	723 / 650
10	-	4.01	4.8	5.61	6.84
11	-	4.01	4.8	5.61	6.84
20	4.67	6.31	7.80	9.31	12.04
21	4.67	6.31	7.80	9.31	12.04
22	4.90	7.31	8.50	9.71	12.21

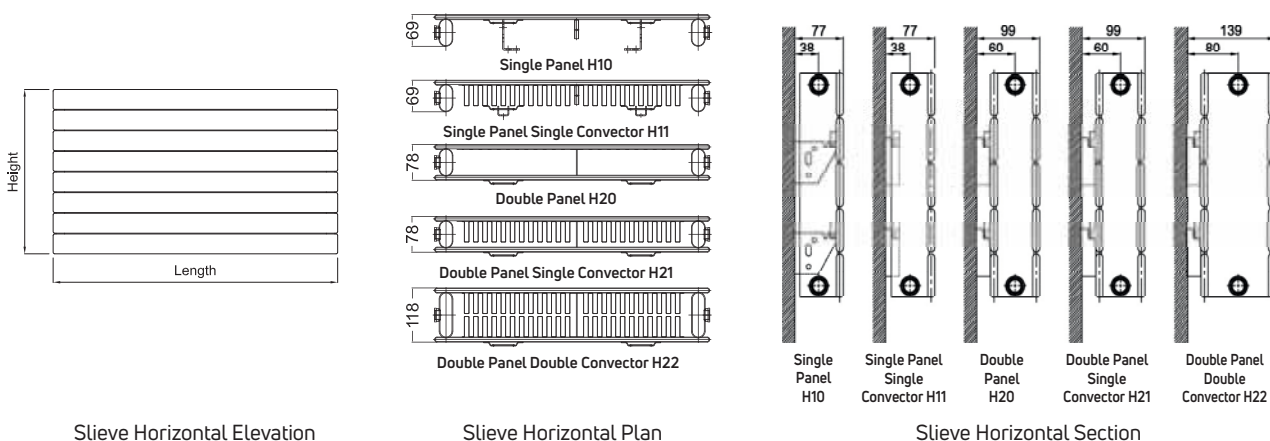


**Note:** the distance between the connection centres equals the length of radiator.

## Slieve Vertical - Single Panel V10

Radiator Height (mm)	1600	1800	2000
Water Content Per Element/Tube (L)	0.95	1.03	1.16

## Slieve Vertical - Double Panel V20

Radiator Height (mm)	1600	1800	2000
Water Content Per Element/Tube (L)	1.89	2.13	2.36

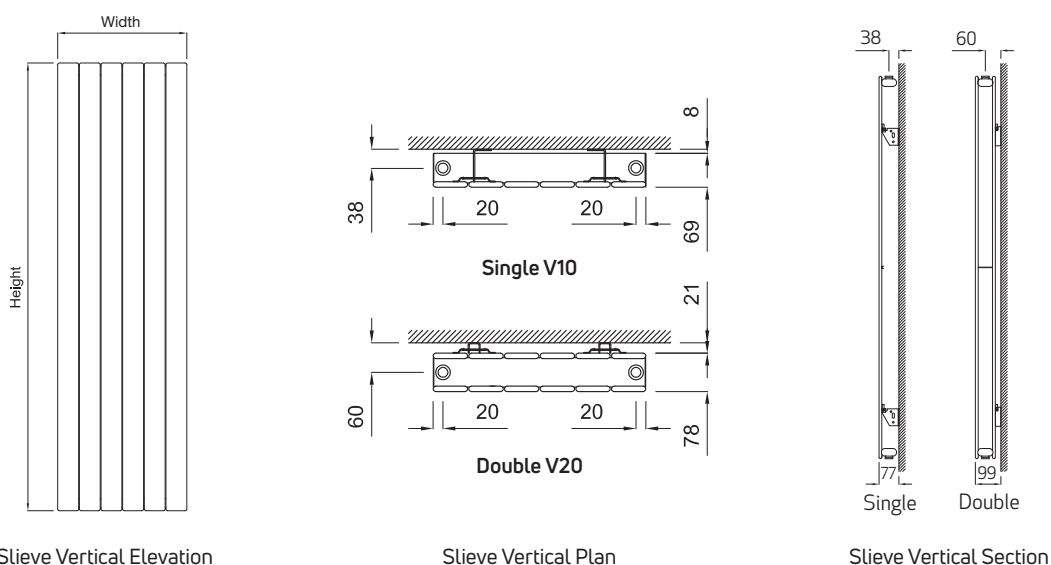


Vertical Sleeves have a factory fitted centre baffle as standard in the bottom header for Bottom Opposite End (BOE) installation only. Horizontal Sleeves are supplied without baffles and cannot be installed Top Bottom Same End (TBSE). All tappings 1/2" BSP.

All Slieve Radiators: Test Pressure: 5.2 bar Max Operating Pressure: 4 bar


# ADAGIO - DESIGN RANGE

## Adagio 35 - Horizontal - Water Content (L)


Type	Length (mm)				
	630	840	980	1400	1995
35 Single	3.96	5.28	6.16	8.80	12.54
35 Double	-	-	10.08	14.40	20.52

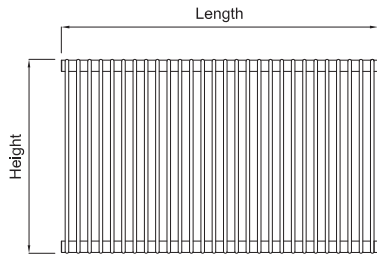

Adagio 35 Horizontal Elevation

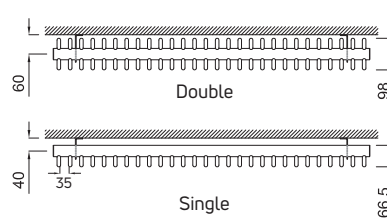

Adagio 35 Horizontal - Single and Double Plan




Adagio 35 Horizontal - Single and Double Section


**Note:** the distance between the connection centres equals the length of radiator.

## Adagio 35 - Vertical - Water Content Per Element /Tube (L)

Type	Height (mm)
35 Single	1800
	0.59



Adagio 35 Vertical Elevation




Adagio 35 Vertical Plan




Adagio 35 Vertical Section

## Adagio 70 - Vertical - Water Content Per Element /Tube (L)


Type	Height (mm)	
	1800	2000
70 Single	1.00	1.11
70 Double	1.94	2.15



Adagio 70 Vertical Elevation



Adagio 70 Vertical Plan



Adagio 70 Vertical Section


All Adagios have a factory fitted centre baffle as standard in the bottom header for Bottom Opposite End (BOE) installation only.  
All tappings 1/2" BSP.

All Adagio Radiators: Test Pressure: 5.2 bar Max Operating Pressure: 4 bar


# FORZA - DESIGN RANGE

## Forza Horizontal - Water Content Per Section (L)

Type	Height (mm)			
	300	500	600	750
2 Column	-	0.60	0.70	-
3 Column	0.60	0.80	1.00	1.10
4 Column	0.80	-	1.20	1.50

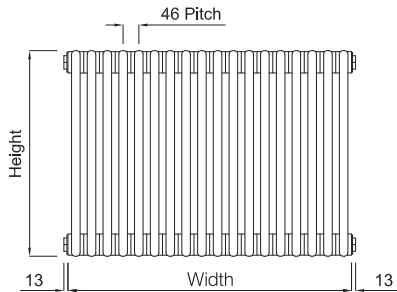


Forza Horizontal Elevation

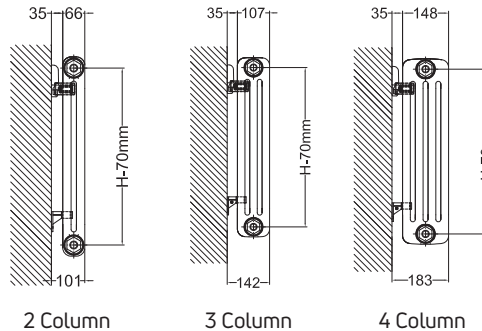


Forza Horizontal Section

## Forza Vertical - Water Content Per Section (L)

Type	Height (mm)	
	1800	2000
2 Column	1.60	1.70
3 Column	-	2.60

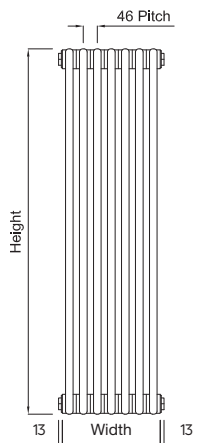

Forza Vertical Elevation

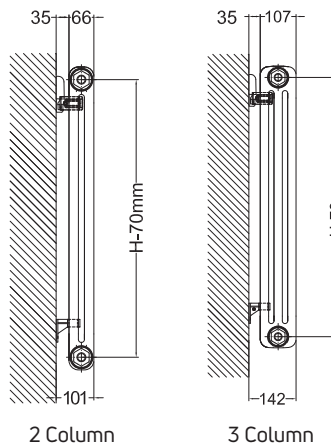


Forza Vertical Section

## Forza - n-Coefficients

Type	Height (mm)					
	300	500	600	750	1800	2000
2 Column	-	1.2553	1.2611	-	1.3205	1.3202
3 Column	1.2495	1.2585	1.2630	1.2699	-	1.3126
4 Column	1.2517	-	1.2681	1.2762	-	-

## Optional Forza Foot

Order code	Description
<b>QMCF1</b>	<b>FORZA Foot 90-120 - white</b>
QMCF1RAL	FORZA Foot 90-120 - coloured
<b>QMCF1</b>	<b>FORZA Foot cover - white</b>



Feet are sold as single unit. Only available for radiators up to 500mm high. Indicate quantity at time of order.  
Feet covered by a 2-year warranty.


Forza radiators are supplied with 1/2" BSP flow diverter to reduce "warm up" time when installed Bottom Opposite End (BOE). Cannot be installed Top Opposite End (TOE). For full width, add 26mm to the width of the radiator indicated in the pricing tables.

All Forza Radiators: Test Pressure: 13 bar Max Operating Pressure: 10 bar




## Dimensions


**KICKSPACE® 500**




**KICKSPACE® 600/600-12v**




**KICKSPACE® 800**




**KICKSPACE® 500 DUO ECO**




**KICKSPACE® 500E ECO**




**KICKSPACE® 600E ECO**



**KICKSPACE® 80S**



**KICKSPACE® 80D**



N.B: Add 4.5mm to the chassis height of the above models to allow for rubber mountings and screws.

## Electric models

Dimensions	Fan Speed	Model		
		500E ECO	600E ECO	
Nominal Height (mm)	-	101	101	
Nominal Depth (mm)	-	203	203	
Nominal Length (mm)	-	496	550	
Sound Levels*	Sound Pressure (dBA) (at 2.5m)	Normal	25.7	26.4
		Boost	38.1	37.2
Weight	Unit Weight (kg)	-	3.1	3.6
Air Flow Rates	Air Flow (m³/h)	Normal	70	106
		Boost	90	138
	Air Flow (ft³/h)	Normal	2471	3742
		Boost	3177	4872

\*Sound levels tested in accordance with EN 23741.

Approximate Hydraulic Resistance	ltr/h	Model							
		500	600	800	600-12V	500 DUO ECO	80S	80D	
		mm wg	455	788	1046	911	1046	788	592
kPa	340	488	625	544	625	488	372	439	
	227	231	326	258	326	231	207	295	
	113	82	95	82	95	82	95	176	
	455	7.7	10.3	8.9	10.3	7.7	5.8	6.0	
	340	4.8	6.1	5.3	6.1	4.8	3.6	4.3	
	227	2.3	3.2	2.5	3.2	2.3	2.0	2.9	
	113	0.8	0.9	0.8	0.9	0.8	0.9	1.7	

\*Sound levels tested in accordance with EN 23741.

†Includes transformer.

## NOTES

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

All prices are recommended retail and include VAT at the current rate.

The prices and specifications shown within this catalogue are for information purposes only and as we continually update our products, they may be subject to change without prior notice. E&OE.

The images/photographs included are for guidance purposes only and are limited to the constraints of the printing process.



Where Comfort Meets Style...

NIKO   
HEATING Uppercross Enterprises Ltd



   
**MYSON PURMO**



Broomhill Business Complex,  
Broomhill Road, Tallaght  
Dublin 24, D24VP80  
01 400 0000



[sales@uel.ie](mailto:sales@uel.ie)



[www.uel.ie](http://www.uel.ie)

